WR0514

18V Low Current Consumption 500mA CMOS LDO

1. General Descriptions

The WR0514 series can provide 500mA output current and the maximum input voltage is 18V，the series is a high accuracy, low noise, high speed, low dropout CMOS Linear regulator with high ripple rejection. The devices offer a new level of cost-effective performance in the battery-powered equipment, such as RF applications and other systems requiring a quiet input voltage.

The WR0514 has the fold-back maximum short output current which depends on the output voltage. So the current limit functions both as a short circuit protection and as an output current limiter.

The WR0514 regulators are available in standard SOT23-3 package、SOT23-5 package、SOT89-3/L package and DFN2×2-6 package. Standard products are Pb-free and Halogen-free.


2. Applications

- MP3/MP4 Players
- Cellphones, radiophone, digital cameras
- Bluetooth, wireless handsets
- Others portable electronic device

3. Features


- Input Voltage: 2.5V to 18V
- Output Voltage: 1.2V to 5V
- Output Current: 500mA
- PSRR: 75dB@1kHz
- Dropout Voltage: 95mV @ I_{OUT} = 100mA
- Shut-down Current: < 1μA
- Quiescent Current: 3.0 μA Typ.
- Recommended Capacitor: 1μF

4. Typical Application

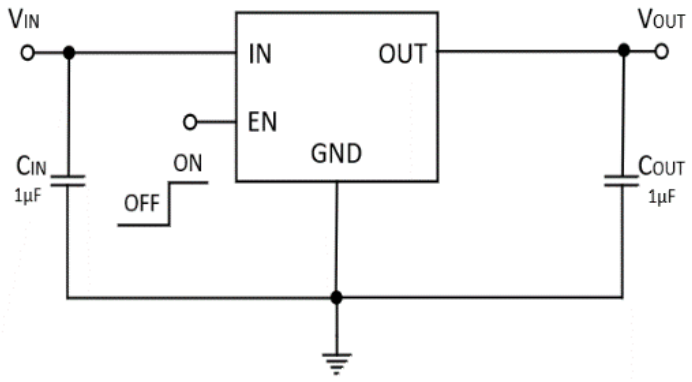


5. Pin Configuration


(Top View)




SOT23-3



SOT23-5



SOT89-3/L



DFN2×2-6

6. Pin Description

PIN NUMBER					PIN NAME	I/O	PIN FUNCTIONS
SOT23-3	SOT23-5	SOT89-3L (A21)	SOT89-3 (A20)	DFN2×2-6			
3	1	2	3	6	IN	I	Input voltage supply. Bypass with a typical 1μF capacitor to GND. Place the input capacitor as close to the IN and GND pins of the device as possible.
1	2	1	2	3	GND	-	Common ground.
-	3	-		4	EN	I	Enable input. Active High. EN includes a small pull-down current source, nominally 0.1μA.
-	4	-		2,5	NC	-	Not connect.
2	5	3	1	1	OUT	O	Regulated output voltage. A low equivalent series resistance (ESR) capacitor, typically 1μF, is required from OUT to ground for stability. Place the output capacitor as close to the OUT and GND pins of the device as possible. An internal 280-Ω (typical) pull-down resistor prevents a charge from remaining on V_{OUT} when the regulator shutdowns.
-	-	-	-	GND	EPAD	-	Exposed pad. It should be connected directly to the GND pin as short as possible or leave floating. Connect the EPAD to a large-area ground plane for best thermal performance. Do not connect to any potential other than GND.

7. Absolute Maximum Ratings[1]

PARAMETER		RATING	UNIT
Input voltage range		-0.3 to 18.0	V
EN Input voltage range		-0.3 to V_{IN}	V
Output voltage range		-0.3 to 6.0	V
Maximum output current		550[2]	mA
Power Dissipation P_D @T_A = 25ºC	SOT23-3 & SOT23-5	500	mW
	SOT89-3/L	625	mW
Thermal Resistance, θ_{JA}	SOT23-3 & SOT23-5	250	ºC/W
	SOT89-3/L	200	ºC/W
Junction Temperature		150	ºC/W
Lead Temperature Range		260	ºC
Storage Temperature Range		-55 to 150	ºC
ESD Susceptibility	HBM	±3000	V

Note1: Greater than these given values, the device will be damaged.
Note2: The maximum current that can be output, but not guaranteed to work properly.

8. Recommended Operating Conditions

PARAMETER	RATING	UNIT
Input voltage range	2.5 to 18.0	V
EN Input voltage range	0 to 18.0	V
Nominal output voltage range	1.2 to 5.0	V
Output current	0 to 500	mA
Input capacitor	1.0	μF
Output capacitor	1.0	μF
Operating temperature range	-40 to 125	ºC

9. Electrical Characteristics

V_{IN}=$V_{OUT(NOMINAL)}$+1V, C_{IN}=C_{OUT}=1μF, T_A=25℃, unless otherwise noted. (Full= -40℃ to 125℃)

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{OUT}	Output Voltage Range	V_{OUT} ≤1.5V, V_{IN}=2.7V, I_{OUT}=1mA	0.97 V_{OUT}	V_{OUT}	1.03 V_{OUT}	V
		V_{OUT}＞1.5V, I_{OUT}=1mA	0.98 V_{OUT}	V_{OUT}	1.02 V_{OUT}	
V_{DO}	Dropout Voltage[1]	V_{OUT}=3.3V, I_{OUT}=500mA, Full		650		mV
		V_{OUT}=3.3V, I_{OUT}=100mA, Full		95		
I_{LIM}	Output current limit	V_{EN}=V_{IN}, T_A=25℃		650		mA
I_{OUT}	Maximum output current in the accuracy range[2]	V_{EN}=V_{IN}, T_A=25℃	500			mA
I_{SHORT}	Short Current	V_{EN}=V_{IN}, V_{OUT} Short to GND		90		mA
LNR	Line Regulation	V_{IN}=2.5~18V, I_{OUT}=1mA		0.01		%/V
LDR	Load Regulation[3]	V_{OUT}=3.3V, I_{OUT}=1~500mA		30		mV
I_Q	Quiescent Current	V_{OUT}=3.3V,I_{OUT}=0mA ,T_A=25℃		3	5	μA
I_{SHDN}	Shut-down Current	V_{EN} = 0V, T_A=25℃		0.3	1.0	μA
R_{DIS}	Output Discharge resistance	V_{IN}=4.0V, V_{EN}=0V,T_A=25℃		280		Ω
PSRR	Power Supply Ripple Rejection	V_{IN}=(V_{OUT}+1V) $_{DC}$+0.5V_{P-P} f=1kHz, I_{OUT}=50mA, T_A=25℃		75		dB
		V_{IN}=(V_{OUT}+1V) $_{DC}$+0.5V_{P-P} f=10kHz, I_{OUT}=50mA, T_A=25℃		45		
V_{NO}	Output Noise Voltage	BW = 10 Hz to 100 kHz, C_{OUT}=1μF, I_{OUT} = 10mA, T_A=25℃		27*V_{OUT}		$μV_{RMS}$
V_{ENH}	EN high voltage (enabled)	V_{IN}=5.5V, I_{OUT}=1mA	1.2			V
V_{ENL}	EN low voltage (disabled)	V_{IN}=5.5V, I_{OUT}=1mA			0.4	V
T_{SD}	Thermal shutdown threshold			150		ºC
$ΔT_{SD}$	Thermal shutdown hysteresis			15		ºC

Note1: The dropout voltage is defined as (V_{IN}-V_{OUT}) when V_{OUT} is $V_{OUT(NOM)}$*98%.

Note2: Maximum output current is affected by the PCB layout, size of metal trace, the thermal conduction path between metal layers, ambient temperature and the other environment factors of system. Attention should be paid to the dropout voltage when V_{IN}< V_{OUT} + V_{DROP}.

Note3: The Load regulation is measured using pulse techniques with duty cycle < 5%.

10. Typical Performance Characteristics

(T_A= -40 to 125ºC, V_{IN}=V_{OUT}+1V, C_{IN}=C_{OUT}=1μF, unless otherwise noted)

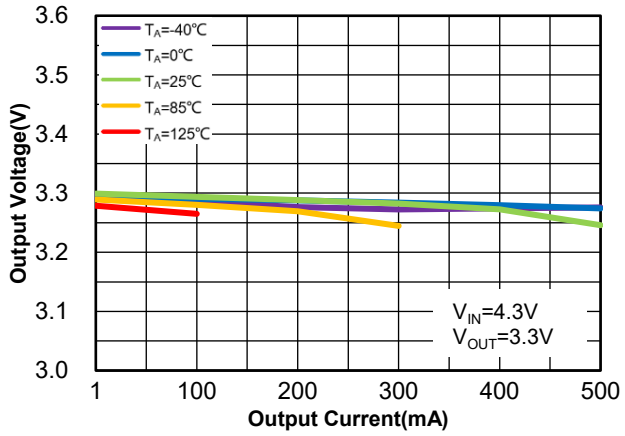


Figure 1. WR0514-33A30R
Load Regulation vs. I_{OUT}

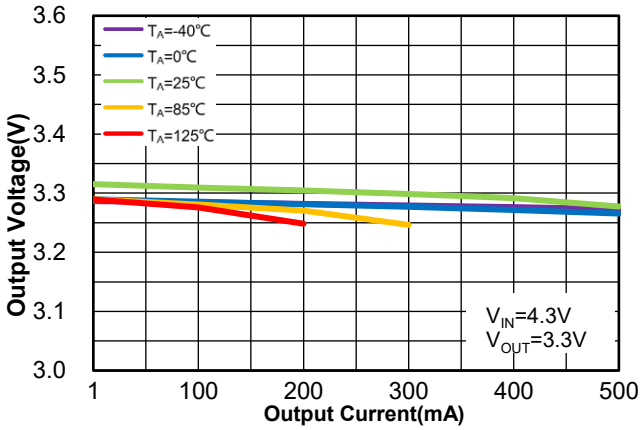


Figure 2. WR0514-33A50R
Load Regulation vs. I_{OUT}

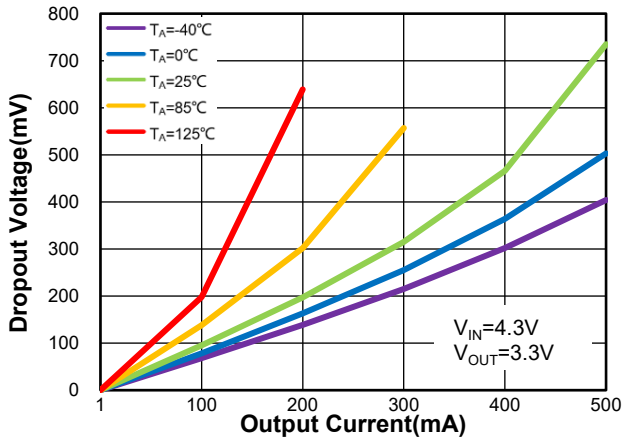


Figure 3. WR0514-33A30R
Dropout Voltage vs. I_{OUT}

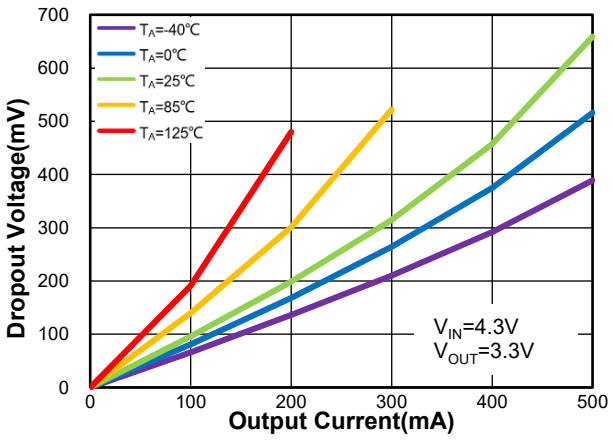


Figure 4. WR0514-33A50R
Dropout Voltage vs. I_{OUT}

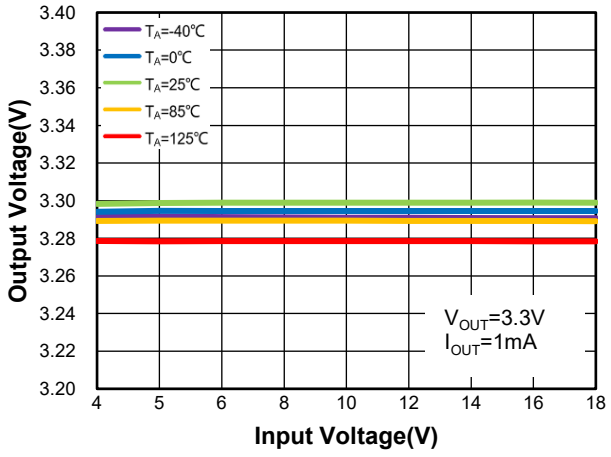


Figure 5. WR0514-33A30R
Regulation vs. V_{IN} (Line Regulation)

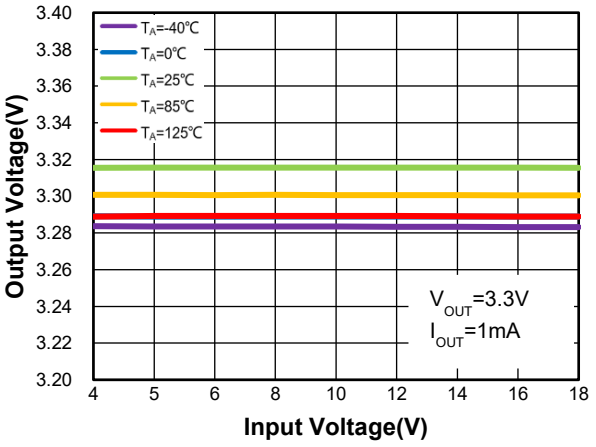


Figure 6. WR0514-33A50R
Regulation vs. V_{IN} (Line Regulation)

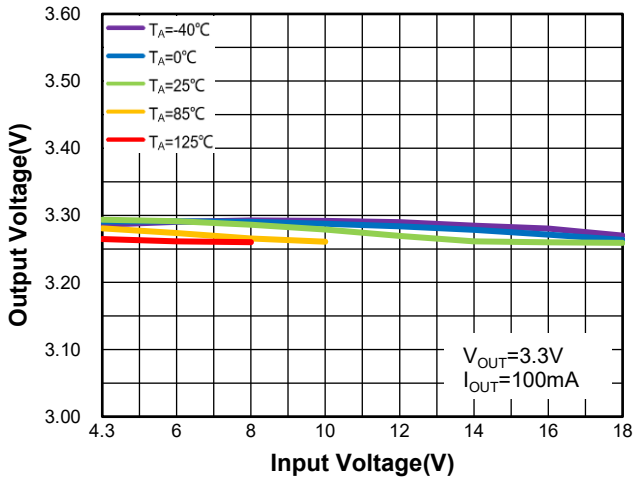


Figure 7. WR0514-33A30R
Regulation vs. V_{IN} (Line Regulation)

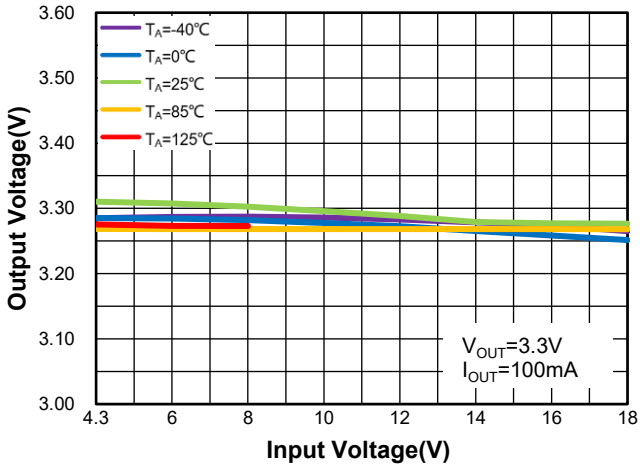


Figure 8. WR0514-33A50R
Regulation vs. V_{IN} (Line Regulation)

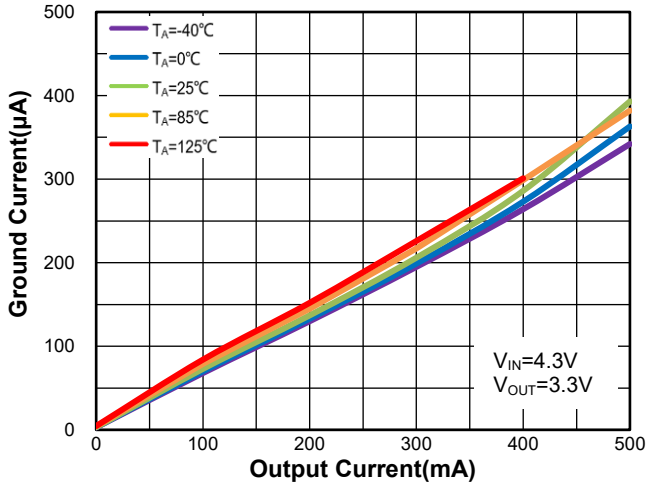


Figure 9.WR0514-33A30R
Ground Pin Current vs. I_{OUT}

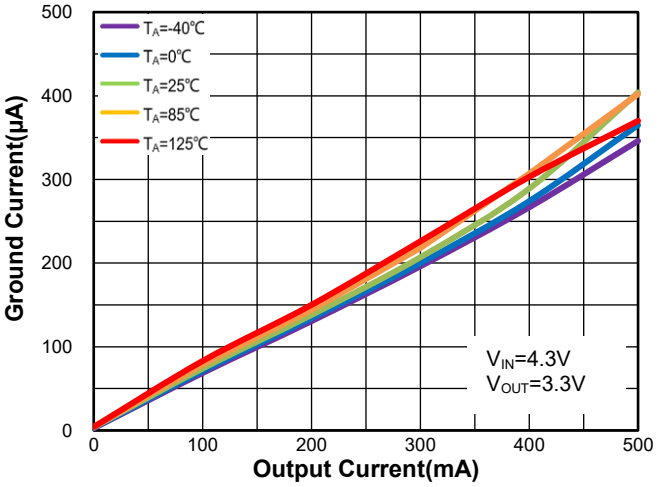


Figure 10.WR0514-33A50R
Ground Pin Current vs. I_{OUT}

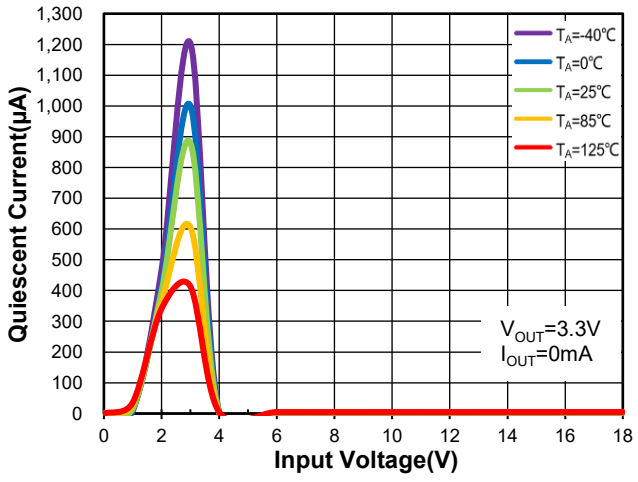


Figure 11.WR0514-33A30R
Quiescent Current vs. V_{IN}

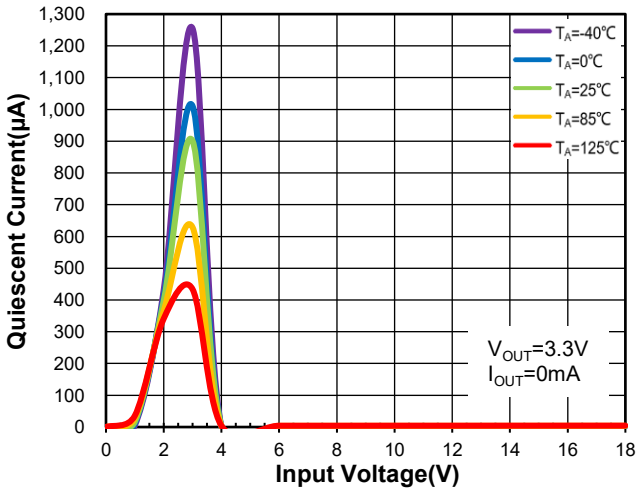


Figure 12.WR0514-33A50R
Quiescent Current vs. V_{IN}

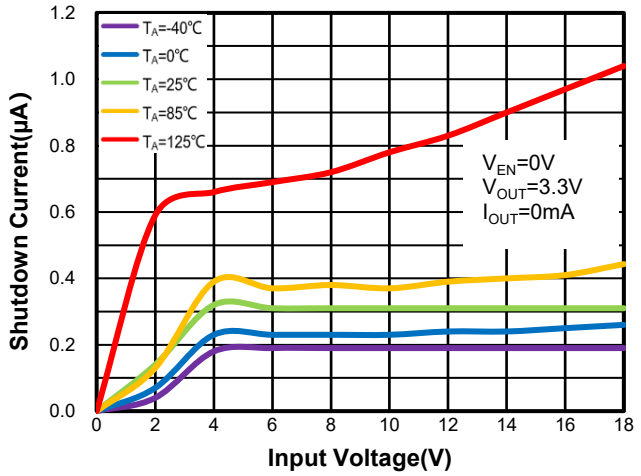


Figure 13.WR0514-33A50R
Shutdown Current vs. V_{IN}

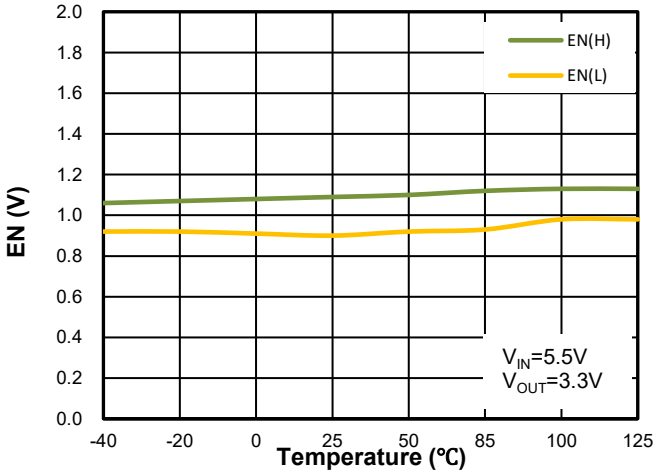


Figure 14.WR0514-33A50R
Enable Threshold

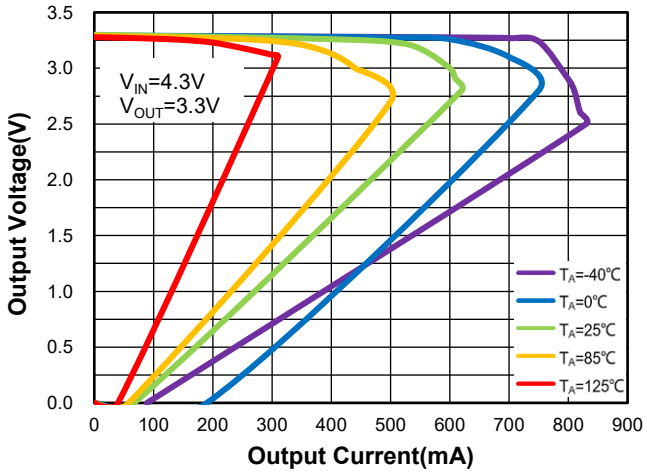


Figure 15.WR0514-33A30R
Foldback Current Limit vs. I_{OUT}

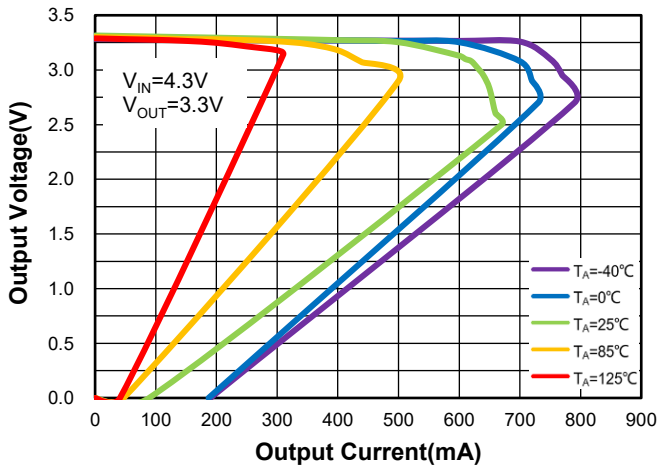


Figure 16.WR0514-33A50R
Foldback Current Limit vs. I_{OUT}

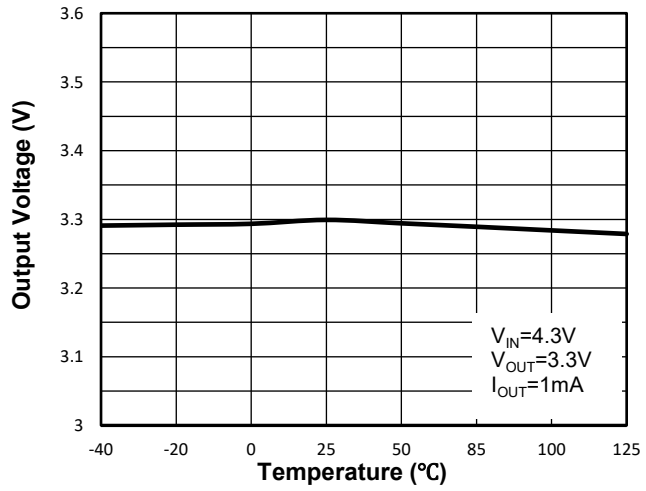


Figure 17.WR0514-33A30R
Output Voltage vs. Ambient Temperature

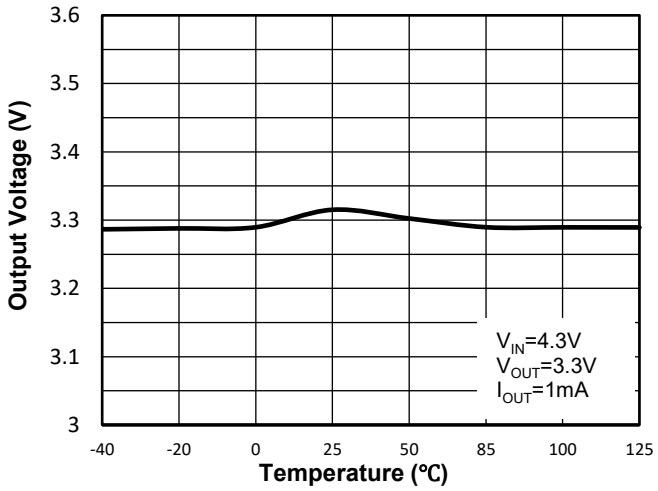


Figure 18.WR0514-33A50R
Output Voltage vs. Ambient Temperature

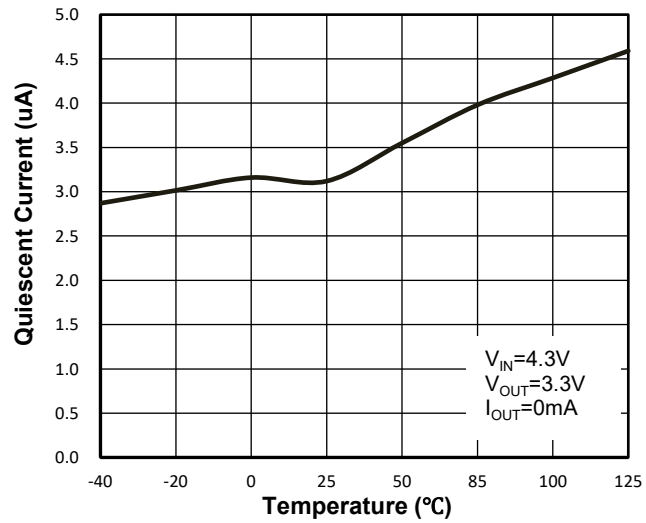


Figure 19.WR0514-33A30R
Quiescent Current vs. Ambient Temperature

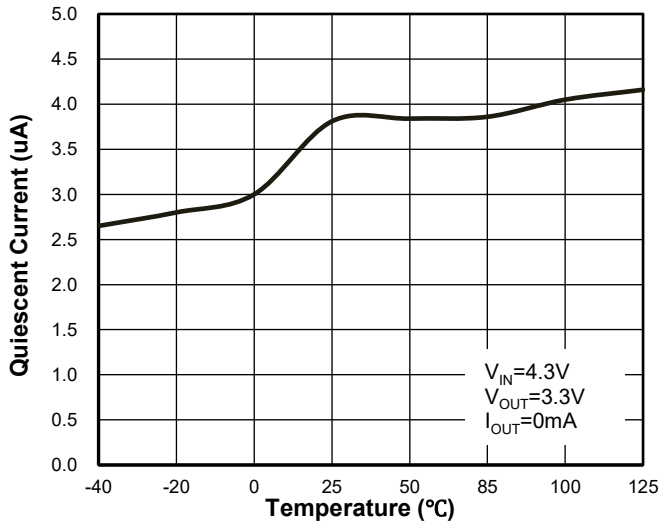


Figure 20.WR0514-33A50R
Quiescent Current vs. Ambient Temperature

.

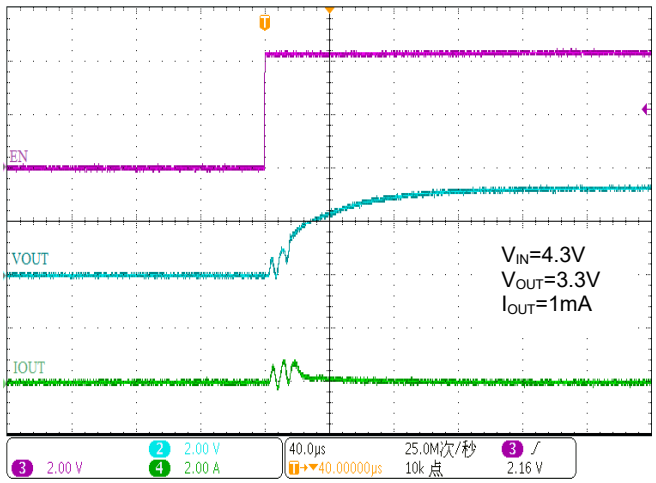


Figure 21.Soft Start from EN

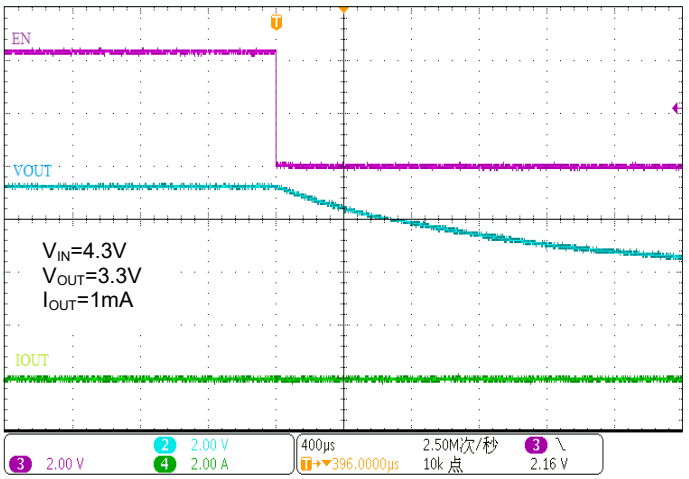


Figure 22.EN Shutdown

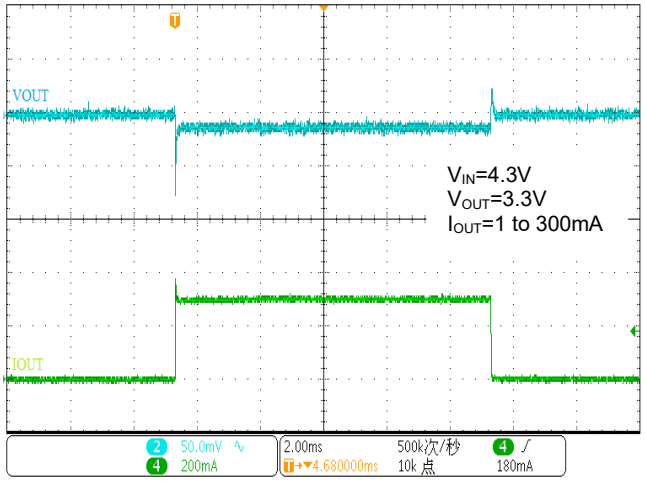


Figure 23. Load Transient

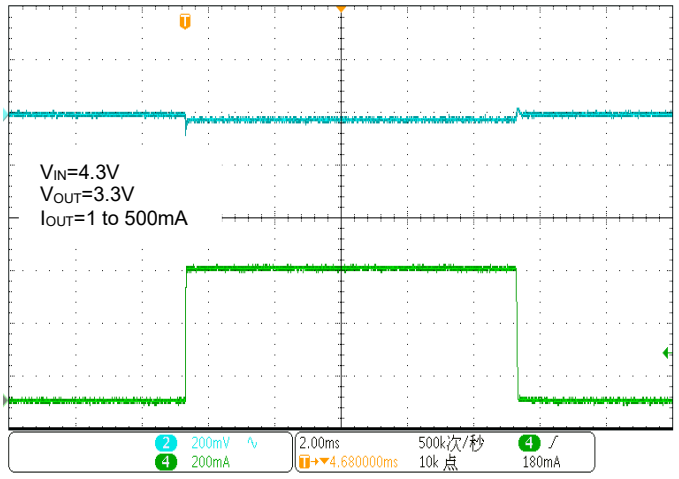


Figure 24. Load Transient

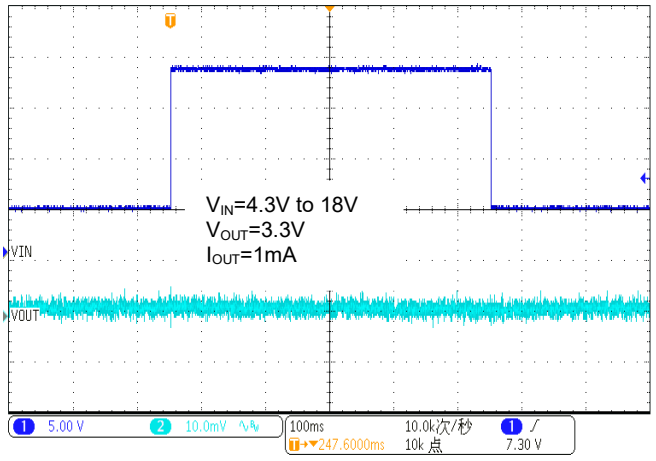


Figure 25.Line Transient

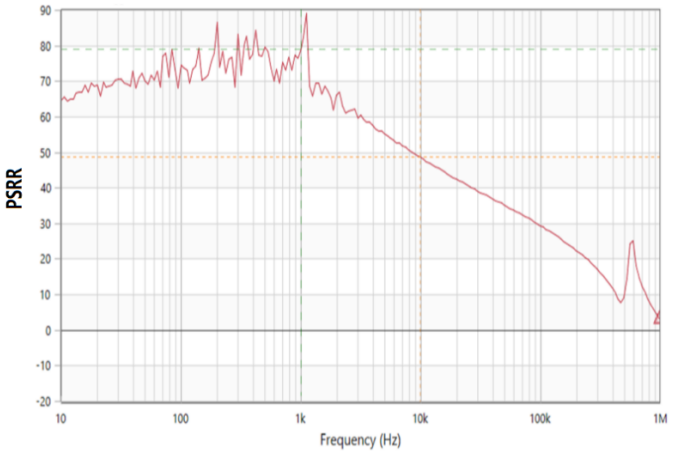



Figure 26.Power Supply Rejection Ratio vs. Frequency

11. Function Description

11.1 Overview

The WR0514 is a high performance PSRR regulator. The device is capable of delivering 500mA with a maximum input voltage of up to 18V and has a low quiescent current. It is therefore suitable for applications using battery power and wide voltage inputs.

11.2 Block Diagram

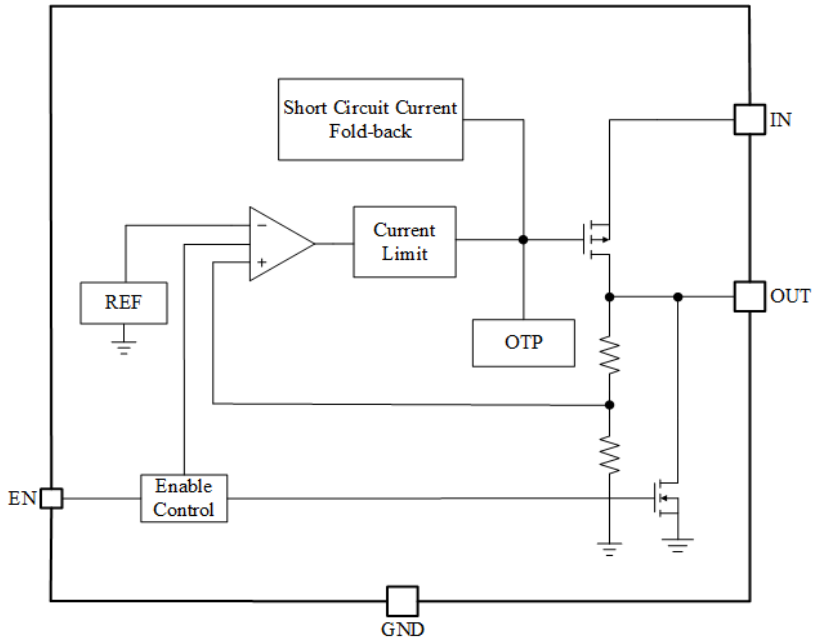

11.3 Feature Description

11.3.1 Output Voltage Accuracy

The WR0514 has two standards for output voltage accuracy, the first being 3% accuracy for output voltages less than or equal to 1.5V and the second being 2% accuracy for output voltages greater than 1.5V. Output voltage accuracy is defined as the maximum and minimum error of the output voltage. This includes internal references, load regulation, errors introduced by differences in line regulation over the entire range of rated load and line operating conditions, taking into account differences between manufacturing lots.

11.3.2 Enable (EN)

The WR0514 enable pin contains a small pull-down current source, typically 0.1μA. When the input voltage of the enable pin is higher than the high enable voltage threshold, the device outputs normally. When the input voltage of the enable pin is lower than the low input voltage threshold of the EN pin, the device outputs normally. If you do not need to control the output voltage independently, connect the enable pin to the input of the device.

11.3.3 Dropout Voltage (V_{DO})

WR0514 is a low dropout voltage LDO that can achieve nominal output voltage at lower input voltages. Dropout voltage is defined as the V_{IN}-V_{OUT} at the rated maximum output current. When the input voltage is below the

nominal output voltage, the output voltage varies with the input voltage. For CMOS regulators, the dropout voltage is determined by the $R_{DS\ (ON)}$ of the pass-FET. The $R_{DS\ (ON)}$ is calculated as follows:

$$R_{DS\ (ON)}=V_{DO}/I_{OUT}$$

11.3.4 Power Supply Rejection Ratio(PSRR)

PSRR, which stands for Power Supply Rejection Ratio, represents the ratio of the two voltage gains obtained when the input and output power supplies are considered as two independent sources.

The basic calculation formula is:

$$PSRR = 20\log(Ripple(in) / Ripple(out))$$

The units are in decibels (dB) and the logarithmic ratio is used.

The above equation shows that the output signal is influenced by the power supply in general, in addition to the circuit itself. PSRR is a quantity used to describe how the output signal is affected by the power supply; the larger the PSRR, the less the output signal is affected by the power supply.

As the level of integration continues to increase, the magnitude of supply current required is also increasing. End users want to extend battery life, i.e. they need very efficient DC/DC conversion processes, using more efficient switching regulators. However, switching regulators generate more ripple in the power line than linear regulators.

The PSRR shows the ability of the LDO to suppress input voltage noise. For a clean, noise-free DC output voltage, use an LDO with a high PSRR.

Noise coupling from the input voltage to the internal reference voltage is the main cause of PSRR performance degradation. Using noise reduction capacitors at the input can effectively filter out noise and improve PSRR performance at low frequencies. The LDO can be used not only to regulate the voltage but also to provide an exceptionally clean DC supply for noise sensitive components.

The WR0514 is a high PSRR LDO that can be used not only for voltage regulation but also for noise cancellation in the power supply.

11.3.5 Noise

LDO noise can be divided into two main categories: internal noise and external noise. Internal noise is the noise generated inside the electronics; external noise is the noise transmitted from outside the circuit to the circuit. The error amplifier determines the PSRR of the LDO and therefore its ability to suppress external noise at the input; internal noise is always present at the output of the LDO.

In practice, minimizing noise from the power supply is critical to system performance. In test and measurement systems, small fluctuations in power supply noise can alter the instantaneous measurement accuracy.

The WR0514 has a low noise reference, high PSRR to ensure that output noise is reduced during normal operation.

11.3.6 Foldback Current Limit (I_{LIM})

In LDO circuits, if an output short circuit or excessive load current occurs, the device may be burned out. Especially in the case of a short circuit, not only is there too much current flowing through the regulator, but the voltage across the source drain of the regulator is also at its maximum, which is likely to burn out the regulator and make the device inoperable. The current limiting circuit used in LDO is a constant current limiting circuit, where the maximum load current that the LDO can supply is limited to a set constant I_{LIM}, and when an overload or short circuit occurs, the output current will be maintained at I_{LIM}, and the output voltage will be reduced to $I_{LIM}R_{LOAD}$.

However, if the external overload or short circuit condition lasts for a long time, the continuous high current will increase the device temperature and increase the power consumption of the whole system. To improve this situation, a foldback current limiting circuit can be used. In a foldback current limiting circuit, both the output current and the output voltage are gradually reduced when the output current reaches the set maximum current I_{LIM}. The output current is reduced to the set current threshold I_{SHORT} and the output voltage is reduced to $I_{SHORT}R_{LOAD}$. The output current is clamped to a smaller value in the event of an overload or short circuit and the system power consumption is reduced and the device temperature does not rise significantly.

The foldback current limiting circuit is essentially a constant current limiting circuit with an output voltage feedback loop, so that in the event of an overload or short circuit, the output current is gradually reduced due to the reduction in output voltage and eventually clamped at a smaller value.

The WR0514 uses a foldback current limiting mode where the final current is clamped to around 90mA, thus providing good protection to the device.

More information on current limiting can be found in Electrical Characteristics *Figure 15* to *Figure 16.*

11.3.7 Thermal Protection

The WR0514 contains a thermal shutdown protection circuit that implements the required switching gate circuit function through a thermal switch integrated inside the chip. The output current is turned off when the heat in the LDO is too high. Thermal shutdown occurs when the thermal junction temperature (T_J) of the energized crystal exceeds 150°C (typical). The thermal shutdown hysteresis ensures that the LDO resets (turns on) again when the temperature drops to 135°C (typical). The thermal time constant of the semiconductor chip is quite short, so when thermal shutdown is reached, the output turns on and off at a higher rate until the power dissipation is reduced. The WR0514's internal protection circuitry is designed to prevent thermal overload conditions. This circuitry is not a substitute for a proper heat sink. Continuously putting the WR0514 into a thermal shutdown state will reduce the reliability of the device.

11.4 Functional Mode Of The Device

The device has three modes: normal, dropout, and disabled modes of operation.

The operating conditions of each mode are listed in the table below.

Operating conditions of each mode

FUNCTIONAL MODE	CONDITIONS			
	V_{IN}	V_{EN}	I_{OUT}	T_J
Normal	$18V>V_{IN} > V_{OUT(NOM)} + V_{DO}$	$V_{EN} > V_{IH(EN)}$	$I_{OUT} < I_{LIM}$	$T_J < T_{SD}$
Dropout	$V_{IN} < V_{OUT(NOM)} + V_{DO}$	$V_{EN} > V_{IH(EN)}$	$I_{OUT} < I_{LIM}$	$T_J < T_{SD}$
Disabled	—	$V_{EN} < V_{IL(EN)}$	—	$T_J > T_{SD}$

11.4.1 Normal Mode

Normal operating mode requires that both of the following conditions are met.

1. The input voltage is greater than the rated output voltage plus the differential voltage ($V_{OUT(NOM)} + V_{DO}$) and is less than 18V.
2. The enable voltage has previously exceeded the enable rise threshold voltage and has not fallen below the enable fall threshold.
3. The output current is less than the current limit ($I_{OUT} < I_{LIM}$).
4. The device ambient temperature is less than the thermal shutdown temperature ($T_A < T_{SD}$).

11.4.2 Dropout Mode

If the input voltage is below the rated output voltage plus a specified dropout voltage, but all other conditions are met for normal operation, the device operates in the dropout state and the output voltage tracks the input voltage. Because the transient performance of the device is significantly reduced through the device being in the triode state, the output current is no longer controlled. Line or load transients during power down can result in large output voltage deviations.

11.4.3 Disabled

The WR0514 can be turned off by forcing the enable pin low, typically with an enable voltage below 0.4V, at which point the pass device is turned off, internal circuits are shutdown, and the output voltage is actively discharged to ground through an internal resistor from output to ground.

12. Application

Note: The information in the Applications section below is not part of WAY-ON's product specifications and WAY-ON does not guarantee its accuracy or completeness. The customer is responsible for determining the suitability of the component for its intended use and should verify and test its design implementation to confirm system functionality.

12.1 Application Information

The WR0514 is a linear voltage regulator with an input voltage of 2.5V to 18V and an output voltage of 1.2V to 5.0V. The accuracy is 3% for output voltages up to 1.5V and 2% for output voltages greater than 1.5V. The maximum output current is 500mA. The efficiency of a linear voltage regulator is determined by the ratio of the output voltage to the input voltage, so in order to achieve high efficiency, the differential voltage (V_{IN} - V_{OUT}) must be as small as possible. This section discusses how best to use this device in practical applications.

12.1.1 Start-Up

12.1.1.1 Enable(EN)

The WR0514 can determine the output of the device through the EN input voltage, EN is higher than the voltage threshold to turn on, in order to prevent the device from turning off when the input voltage drops during the turn-on period, EN has a certain hysteresis. WR0514 internal EN to IN has a pull-down resistor, the pull-down current is about 100nA, when EN floats default to high, if you do not need EN independent control, it is recommended to connect EN directly to IN. If you want to use the EN control, you need to give a control voltage to the EN side.

12.1.1.2 Automatic Discharge

The WR0514 has an internal pull-down MOSFET that connects a discharge resistor from V_{OUT} to ground to actively release the output voltage when the device is disabled.

12.1.2 Capacitor Recommendation

The WR0514 uses ceramic capacitors with low equivalent series resistance (ESR) at the V_{IN} and V_{OUT} pins to increase its stability. Multilayer ceramic capacitors are recommended. These capacitors also have limitations, and ceramic capacitors with X7R-, X5R-, and COG-rated dielectric materials have relatively good capacitance stability at different temperatures. WR0514 is designed to use ceramic capacitors of 1 μF or larger at the input and output. Place C_{IN} and C_{OUT} as close to the IN and OUT pins as possible to minimize trace inductance from the capacitor to the device.

12.1.3 Power Dissipation(P_D)

The reliability of the circuit requires reasonable consideration of the power dissipation of the device, the location of the circuit on the PCB, and the proper sizing of the thermal plane. The regulator should be surrounded by no other heat generating devices as much as possible. The power dissipation of the regulator depends on the input and output voltage difference and the load conditions.

PD can be calculated using the following equation:

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT}$$

Using the proper input voltage minimizes the power dissipation, resulting in greater efficiency. To obtain the lowest power dissipation, use the minimum input voltage required for normal output voltage. The maximum power dissipation determines the maximum allowable ambient temperature (T_A) of the device. Power dissipation and junction temperature are typically related to the junction-ambient thermal resistance (θ_{JA}) and ambient air temperature (T_A) of the PCB and package and are calculated as follows:


$$T_J = T_A + (\theta_{JA} \times P_D)$$

The thermal resistance (θ_{JA}) depends primarily on the thermal dispersion capability of the PCB design. The total copper area, copper weight, and the location of the plane all affect the thermal dispersion capability, and the PCB and copper laydown area can only be used as a relative measure of the package's thermal performance.


12.2 Typical Application

This section discusses the application of the WR0514 in the circuit. The following figure shows the schematic of the application circuit.

Circuit schematic 1: V_{OUT} normally open, no control.

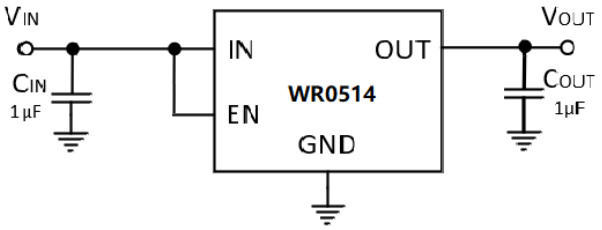

Circuit schematic 2: V_{OUT} control by external voltage to EN.

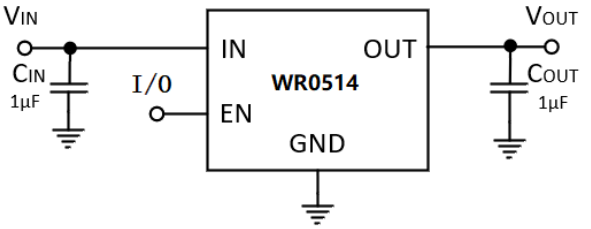

C_{IN} and C_{OUT} are to be selected with the recommended appropriate capacitance. 1μF ceramic capacitors are selected for both C_{IN} and C_{OUT} to help balance the charge needed to charge the output capacitor during startup, thus reducing the input voltage drop.


13. Power supply recommendation

The WR0514 has a V_{IN} range of between 2.5V and 18V and an input capacitance of 1μF. The input voltage should have some redundancy to ensure a stable output voltage when the load fluctuates. If the input supply is noisy, additional input capacitors can be used to improve the noise performance of the output.

14. Layout Guidelines

The principle of LDO design is to place all components on the same side of the board and connect them as close as possible to their respective LDO pins. Connect the C_{IN} and C_{OUT} grounds, with all LDO ground pins as close together as possible, through a wide copper surface. Using through-holes and long wires for connections is strongly discouraged and can seriously affect system performance. To improve thermal performance, an array of thermal vias is used to connect the thermal pad to the ground plane. A larger ground plane improves the thermal performance of the device and reduces the operating temperature of the device.

Layout Example:

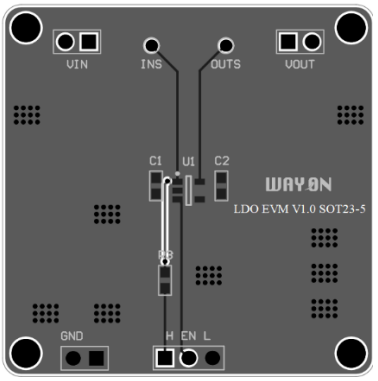

15. Evaluation Modules

Evaluation Modules (EVMs) are available to help evaluate initial circuit performance. We have evaluation modules for different packages, you can contact us by phone or address at the end to get the evaluation module or schematic.

The module names are listed in the table below.

Name	Package	Evaluation Module
WR0514	SOT23-3	WAYON LDO EVM V1.0 -SOT23-3
	SOT23-5	WAYON LDO EVM V1.0 - SOT23-5
	SOT89-3/L	WAYON LDO EVM V1.0 – SOT89-3/L

16. Naming conventions

WR AA BB-CC DDD E

WR: WAYON Regulator

AA: 05 - Output Current, 500mA

BB: Serial number

CC: Output Voltage/AD-Output Voltage, Adjustable Voltage

DDD: A30-Package, SOT23-3
A50-Package, SOT23-5
A20/21- Package, SOT89-3/3L
F26- Package, DFN2×2-6


E: R-Reel & T-tube

17. Electrostatic discharge warning

ESD can cause irreversible damage to integrated circuits, ranging from minor performance degradation to device failure. Precision ICs are more susceptible to damage because very minor parameter changes can cause the device to be out of compliance with its published specifications. WAY-ON recommends that all ICs be handled with proper precautions. Failure to follow proper handling practices and installation procedures may damage the IC.


18. Package Information

SOT 23-3

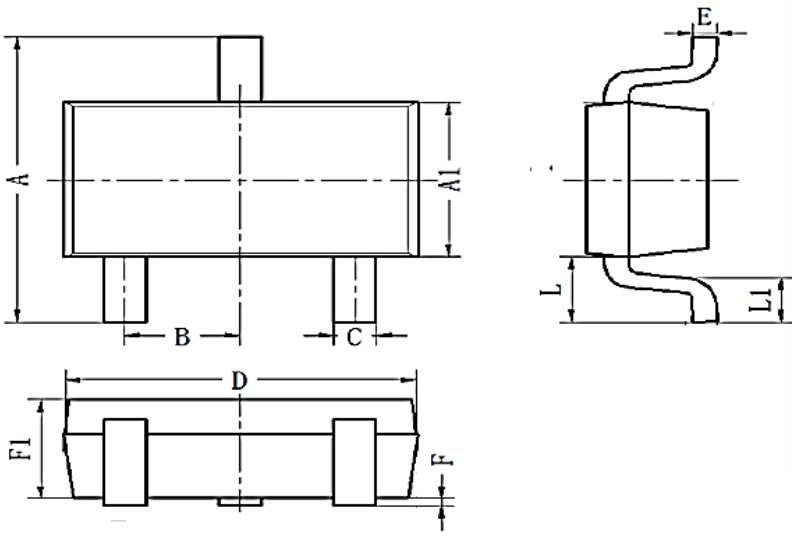


SYMBOL	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	2.60	2.80	3.00
A1	1.50	1.60	1.70
B		0.95BSC	
C	0.25	0.40	0.50
D	2.82	2.92	3.02
E	0.08	0.15	0.20
L		0.59REF	
L1	0.30	0.45	0.60
F1	0.90	1.10	1.30
F	0.00	0.08	0.15

SOT 23-5

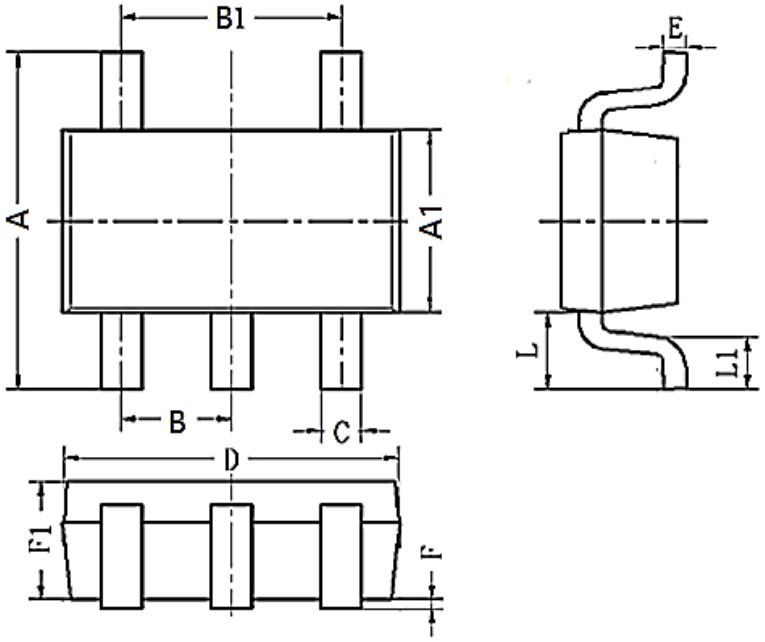


SYMBOL	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	2.60	2.80	3.00
A1	1.50	1.60	1.70
B	0.85	0.95	1.05
B1	1.80	1.90	2.00
C	0.25	0.37	0.50
D	2.79	2.90	3.02
E	0.10	0.15	0.20
F	0.00	0.10	0.15
L	0.60REF		
F1	0.85	1.10	1.30
L1	0.30	0.45	0.60

SOT89-3/L

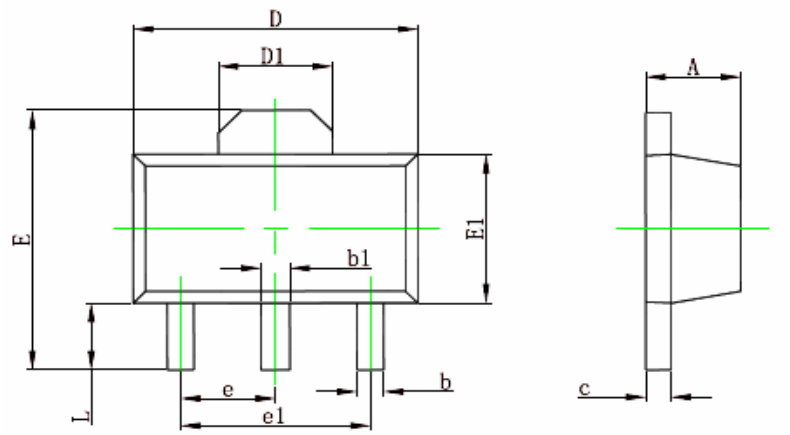


SYMBOL	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	1.4	1.5	1.6
b	0.32	0.42	0.52
b1	0.38	0.48	0.58
c	0.35	0.405	0.46
D	4.40	4.50	4.60
D1	1.5	1.65	1.8
E	3.94	4.12	4.30
E1	2.30	2.45	2.60
e	1.50BSC		
e1	3.00BSC		
L	0.80	1.00	1.20

DFN2×2-6

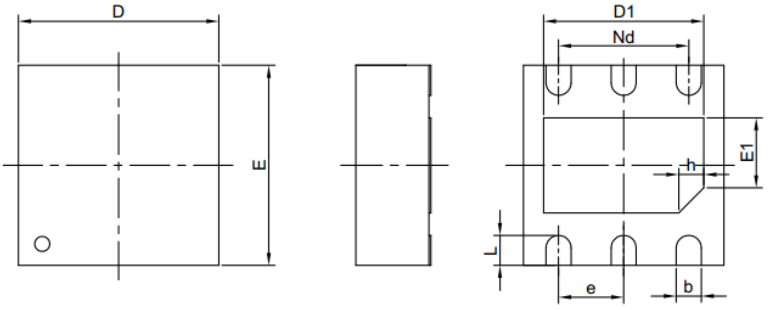

Top View　　Side View　　Bottom View



Side View

SYMBOL	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A2		0.203REF	
b	0.18	0.25	0.35
D	1.90	2.00	2.10
D1	1.50	1.60	1.70
E	1.90	2.00	2.10
E1	0.85	0.95	1.10
e		0.65BSC	
Nd		1.30BSC	
L	0.18	0.25	0.35
h	0.15	0.25	0.30

19. Ordering Information

Part Number	Output Voltage	Package	Packing Quantity	Marking*
WR0514-12A21R	1.2V	SOT89-3L	1k/Reel	WR0514 12 XXXX
WR0514-15A21R	1.5V	SOT89-3L	1k/Reel	WR0514 15 XXXX
WR0514-18A21R	1.8V	SOT89-3L	1k/Reel	WR0514 18 XXXX
WR0514-20A21R	2.0V	SOT89-3L	1k/Reel	WR0514 20 XXXX
WR0514-22A21R	2.2V	SOT89-3L	1k/Reel	WR0514 22 XXXX
WR0514-25A21R	2.5V	SOT89-3L	1k/Reel	WR0514 25 XXXX
WR0514-28A21R	2.8V	SOT89-3L	1k/Reel	WR0514 28 XXXX
WR0514-30A21R	3.0V	SOT89-3L	1k/Reel	WR0514 30 XXXX
WR0514-33A21R	3.3V	SOT89-3L	1k/Reel	WR0514 33 XXXX
WR0514-36A21R	3.6V	SOT89-3L	1k/Reel	WR0514 36 XXXX
WR0514-45A21R	4.5V	SOT89-3L	1k/Reel	WR0514 45 XXXX
WR0514-50A21R	5.0V	SOT89-3L	1k/Reel	WR0514 50 XXXX
WR0514-12A20R	1.2V	SOT89-3	1k/Reel	WR0514 12 XXXX
WR0514-15A20R	1.5V	SOT89-3	1k/Reel	WR0514 15 XXXX
WR0514-18A20R	1.8V	SOT89-3	1k/Reel	WR0514 18 XXXX
WR0514-20A20R	2.0V	SOT89-3	1k/Reel	WR0514 20 XXXX
WR0514-22A20R	2.2V	SOT89-3	1k/Reel	WR0514 22 XXXX
WR0514-25A20R	2.5V	SOT89-3	1k/Reel	WR0514 25 XXXX
WR0514-28A20R	2.8V	SOT89-3	1k/Reel	WR0514 28 XXXX
WR0514-30A20R	3.0V	SOT89-3	1k/Reel	WR0514 30 XXXX
WR0514-33A20R	3.3V	SOT89-3	1k/Reel	WR0514 33 XXXX
WR0514-36A20R	3.6V	SOT89-3	1k/Reel	WR0514 36 XXXX
WR0514-45A20R	4.5V	SOT89-3	1k/Reel	WR0514 45 XXXX
WR0514-50A20R	5.0V	SOT89-3	1k/Reel	WR0514 50 XXXX
WR0514-12A30R	1.2V	SOT23-3	3k/Reel	WR0514 12 XXXX
WR0514-15A30R	1.5V	SOT23-3	3k/Reel	WR0514 15 XXXX
WR0514-18A30R	1.8V	SOT23-3	3k/Reel	WR0514 18 XXXX
WR0514-20A30R	2.0V	SOT23-3	3k/Reel	WR0514 20 XXXX
WR0514-22A30R	2.2V	SOT23-3	3k/Reel	WR0514 22 XXXX
WR0514-25A30R	2.5V	SOT23-3	3k/Reel	WR0514 25 XXXX
WR0514-28A30R	2.8V	SOT23-3	3k/Reel	WR0514 28 XXXX
WR0514-30A30R	3.0V	SOT23-3	3k/Reel	WR0514 30 XXXX
WR0514-33A30R	3.3V	SOT23-3	3k/Reel	WR0514 33 XXXX
WR0514-36A30R	3.6V	SOT23-3	3k/Reel	WR0514 36 XXXX

Part Number	Output Voltage	Package	Packing Quantity	Marking*
WR0514-45A30R	4.5V	SOT23-3	3k/Reel	WR0514 45 XXXX
WR0514-50A30R	5.0V	SOT23-3	3k/Reel	WR0514 50 XXXX
WR0514-12A50R	1.2V	SOT23-5	3k/Reel	WR0514 12 XXXX
WR0514-15A50R	1.5V	SOT23-5	3k/Reel	WR0514 15 XXXX
WR0514-18A50R	1.8V	SOT23-5	3k/Reel	WR0514 18 XXXX
WR0514-20A50R	2.0V	SOT23-5	3k/Reel	WR0514 20 XXXX
WR0514-22A50R	2.2V	SOT23-5	3k/Reel	WR0514 22 XXXX
WR0514-25A50R	2.5V	SOT23-5	3k/Reel	WR0514 25 XXXX
WR0514-28A50R	2.8V	SOT23-5	3k/Reel	WR0514 28 XXXX
WR0514-30A50R	3.0V	SOT23-5	3k/Reel	WR0514 30 XXXX
WR0514-33A50R	3.3V	SOT23-5	3k/Reel	WR0514 33 XXXX
WR0514-36A50R	3.6V	SOT23-5	3k/Reel	WR0514 36 XXXX
WR0514-45A50R	4.5V	SOT23-5	3k/Reel	WR0514 45 XXXX
WR0514-50A50R	5.0V	SOT23-5	3k/Reel	WR0514 50 XXXX
WR0514-12F26R	1.2V	DFN2×2-6	10k/Reel	514 12 XXXX
WR0514-15F26R	1.5V	DFN2×2-6	10k/Reel	514 15 XXXX
WR0514-18F26R	1.8V	DFN2×2-6	10k/Reel	514 18 XXXX
WR0514-20F26R	2.0V	DFN2×2-6	10k/Reel	514 20 XXXX
WR0514-22F26R	2.2V	DFN2×2-6	10k/Reel	514 22 XXXX
WR0514-25F26R	2.5V	DFN2×2-6	10k/Reel	514 25 XXXX
WR0514-28F26R	2.8V	DFN2×2-6	10k/Reel	514 28 XXXX
WR0514-30F26R	3.0V	DFN2×2-6	10k/Reel	514 30 XXXX
WR0514-33F26R	3.3V	DFN2×2-6	10k/Reel	514 33 XXXX
WR0514-36F26R	3.6V	DFN2×2-6	10k/Reel	514 36 XXXX
WR0514-45F26R	4.5V	DFN2×2-6	10k/Reel	514 45 XXXX
WR0514-50F26R	5.0V	DFN2×2-6	10k/Reel	514 50 XXXX

* XXXX is variable.

Contact Information

No.1001, Shiwan(7) Road, Pudong District, Shanghai, P.R.China.201207
Tel: 86-21-50310888 Fax: 86-21-50757680 Email: market@way-on.com
WAYON website: http://www.way-on.com
For additional information, please contact your local Sales Representative.
WAYON ® is registered trademark of Wayon Corporation.

Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

Product Specification Statement

- The product specification aims to provide users with a reference regarding various product parameters, performance, and usage. It presents certain aspects of the product's performance in graphical form and is intended solely for users to select product and make product comparisons, enabling users to better understand and evaluate the characteristics and advantages of the product. It does not constitute any commitment, warranty, or guarantee.
- The product parameters described in the product specification are numerical values, characteristics, and functions obtained through actual testing or theoretical calculations of the product in an independent or ideal state. Due to the complexity of product applications and variations in test conditions and equipment, there may be slight fluctuations in parameter test values. WAYON shall not guarantee that the actual performance of the product when installed in the customer's system or equipment will be entirely consistent with the product specification, especially concerning dynamic parameters. It is recommended that users consult with professionals for product selection and system design. Users should also thoroughly validate and assess whether the actual parameters and performance when installed in their respective systems or equipment meet their requirements or expectations. Additionally, users should exercise caution in verifying product compatibility issues, and WAYON assumes no responsibility for the application of the product.
- WAYON strives to provide accurate and up-to-date information to the best of our ability. However, due to technical, human, or other reasons, WAYON cannot guarantee that the information provided in the product specification is entirely accurate and error-free. WAYON shall not be held responsible for any losses or damages resulting from the use or reliance on any information in these product specifications. WAYON reserves the right to revise or update the product specification and the products at any time without prior notice, and the user's continued use of the product specification is considered an acceptance of these revisions and updates. Prior to purchasing and using the product, users should verify the above information with WAYON to ensure that the product specification is the most current, effective, and complete. If users are particularly concerned about product parameters, please consult WAYON in detail or request relevant product test reports. Any data not explicitly mentioned in the product specification shall be subject to separate agreement.
- Users are advised to pay attention to the parameter limit values specified in the product specification and maintain a certain margin in design or application to ensure that the product does not exceed the parameter limit values defined in the product specification. This precaution should be taken to avoid exceeding one or more of the limit values, which may result in permanent irreversible damage to the product, ultimately affecting the quality and reliability of the system or equipment.
- The design of the product is intended to meet civilian needs and is not guaranteed for use in harsh environments or precision equipment. It is not recommended for use in systems or equipment such as medical devices, aircraft, nuclear power, and similar systems, where failures in these systems or equipment could reasonably be expected to result in personal injury. WAYON shall assume no responsibility for any consequences resulting from such usage.
- Users should also comply with relevant laws, regulations, policies, and standards when using the product specification. Users are responsible for the risks and liabilities arising from the use of the product specification and must ensure that it is not used for illegal purposes. Additionally, users should respect the intellectual property rights related to the product specification and refrain from infringing upon any third-party legal rights. WAYON shall assume no responsibility for any disputes or controversies arising from the above-mentioned issues in any form.