
WPM5DT502SU

500V 5A half-bridge Integrated Power Modules

Description


WPM5DT502SU is half-bridge Modules (IPM) designed for advanced appliance motor drive applications such as energy efficient fans and pumps.These modules Integrated 2 MOSFET and 1 high voltage gate driver in a familiar package.

SOICW16-12



Features

- 500V half-bridge including high voltage gate drivers
- Works with 3.3V/5V MCU, Active-High interface
- Integrated bootstrap functionality
- HVIC for Under-voltage Protection
- HVIC Temperature-Sensing Built-In for temperature Monitoring

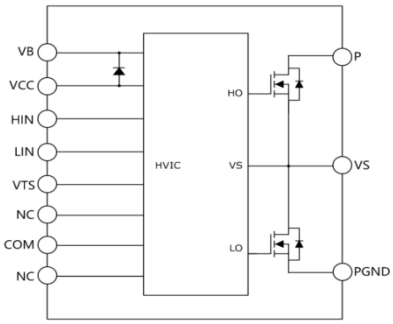


Applications

- Energy efficient fans
- Pumps
- High speed hair dryer

Part	Package	Marking	QTY(PCS)	Packing method
WPM5DT502SU	SOICW16-12	WPM5DT502SU	1500	Tube

Module Pin-Out Description

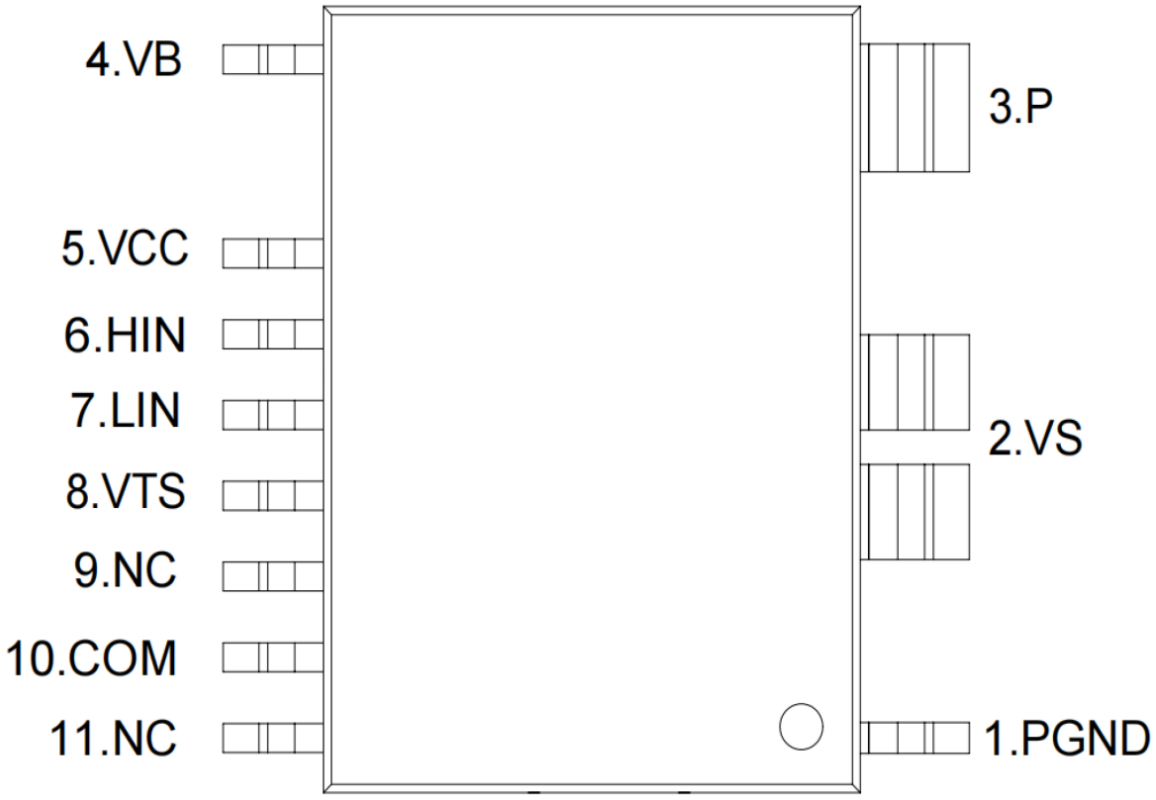

Pin Number	Pin Name	Description
1	PGND	Source for low side MOSFET
2	VS	High Side Floating Offset Voltage
3	P	DC Bus Voltage Positive
4	VB	High Side Floating Supply Voltage
5	VCC	Power supply for low side
6	HIN	Logic Input for High Side Gate Driver
7	LIN	Logic Input for Low Side Gate Driver
8	VTS	Temperature-sensing Voltage Output
9	NC	No Connected
10	COM	Logic Ground
11	NC	No Connected

Absolute Maximum Ratings（T_C=25℃ unless otherwise specified）

Inverter Part

Parameter	Symbol	Condition	Ratings	Unit
Drain-Source Voltage of Each MOSFET	V_{DSS}	-	500	V
Each MOSFET Current, Continuous	I_D	T_c=25℃ (Silicon limit)	5	A
Each MOSFET Current, Peak	I_{DP}	T_c=25℃ Pulse width less than 100us	7.1	A
Maximum Power Dissipation	P_D	T_c=25℃ For Each MOSFET	13.7	W

Control Part

Parameter	Symbol	Condition	Ratings	Unit
Control Supply Voltage	V_{CC}	Applied between V_{CC} - COM	20	V
High-side Bias Voltage	V_{BS}	T_c=25℃ (Silicon limit)	20	V
Input Signal Voltage	V_{IN}	T_c=25℃ Pulse width less than 100us	-0.3~V_{CC}+0.3	V

Bootstrap Diode Part

Parameter	Symbol	Condition	Ratings	Unit
Bootstrap Diode Reverse Voltage	V_{RRMB}	-	500	V

System

Parameter	Symbol	Condition	Ratings	Unit
Operating Junction Temperature	T_j	-	-20~+150	℃
Storage temperature	T_{STG}	-	-20~+125	℃

Thermal Resistance

Parameter	Symbol	Condition	Ratings	Unit
Junction to Case Thermal Resistance	Rth(j-c)	For Each MOSFET	9.1	K/W

Recommended Operating Conditions（T_C=25℃）

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Power Supply Voltage	V_{PN}	Applied between P – N	-	300	400	V
Control Supply Voltage	V_{CC}	Applied between V_{CC} – COM	13.5	15.0	16.5	V
High side Supply Voltage	V_{BS}	Applied between V_B – V_S	13.5	15.0	16.5	V
Dead time	t_{dead}	For each input signal	1	-	-	μs
PWM input frequency	f_{PWM}	V_{CC} = V_{BS} = 13.5~16.5	-	25	-	kHz

Electrical Characteristics (T_C=25℃)

Inverter Part

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	V_{IN} = 0V , I_D =250uA (NOTE 2)	500	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{IN} = 0V , V_{DS} = 500V	-	-	10	μA
Drain-Source Diode Forward Voltage	V_{SD}	V_{CC} = V_{BS}= 15V,V_{IN} = 0V,I_D = -5A	-	-	1.4	V
Drain-Source Turn-On Resistance	R_{DSON}	V_{CC} = V_{BS}= 15V,V_{IN} = 5V,I_D = 2.5A	-	1.7	2.0	Ω
Switching time	t_{on}	V_D = 300V, V_{CC} = V_{BS} = 15V , I_D =5A , V_{IN} = 0V—5V, Inductive Load (NOTE 3)	-	780	-	ns
	t_{off}		-	600	-	ns
	t_{rr}		-	130	-	ns
	E_{on}		-	230	-	μJ
	E_{off}		-	15	-	μJ

NOTE 2: BVDSS is the absolute maximum voltage rating between drain and source terminal of each MOSFET inside IPM. V_{PN} should be sufficiently less than this value considering the effect of the stray inductance so that V_{DS} should not exceed BV_{DSS} in any case.

NOTE 3: t_{ON} and t_{OFF} include the internal transmission delay time of the driver IC. Please refer to Figure 1 for details.

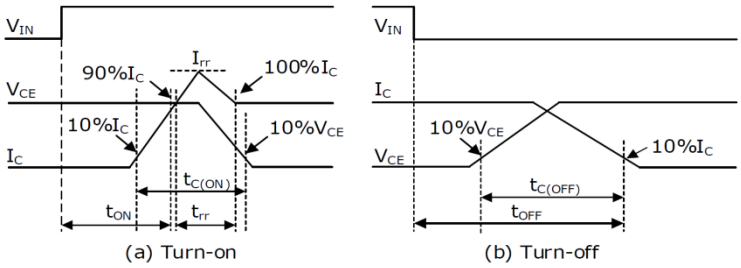


Figure 1: Switching Time Definition

Control Part

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
V_{CC} Quiescent Current	I_{QCC}	V_{CC} = 15V ,V_{IN} = 0V	-	270	400	μA
V_{BS} Quiescent Current	I_{QBS}	V_{BS} = 15V ,V_{IN} = 0V	-	75	160	μA
Input current	I_{IN}	V_{IN} = 5V	-	10	-	μA
Low-side under-voltage protection(UV)	UV_{CCD}	Detection level	8.0	8.8	9.6	V
	UV_{CCR}	Reset level	8.4	9.2	10.0	V
High-side under-voltage protection(UV)	UV_{BSD}	Detection level	8.0	8.8	9.6	V
	UV_{BSR}	Reset level	8.4	9.2	10.0	V
Turn on threshold voltage	V_{IH}	Applied between V_{IN} - COM	-	-	3.0	V
Turn off threshold voltage	V_{IL}		1.5	-	-	V
Temperature output	V_{TS}	T_{HVIC} = 25°C	0.64	0.89	1.14	V
		T_{HVIC} = 100°C	2.00	2.26	2.51	V

Bootstrap Diode Part

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_{FB}	I_F = 10mA , T_C = 25℃	-	3.0	-	V
Bootstrap emulator on resistance	R_{BSD}	V_{CC} = 15V, T_C = 25℃	-	240	-	Ω


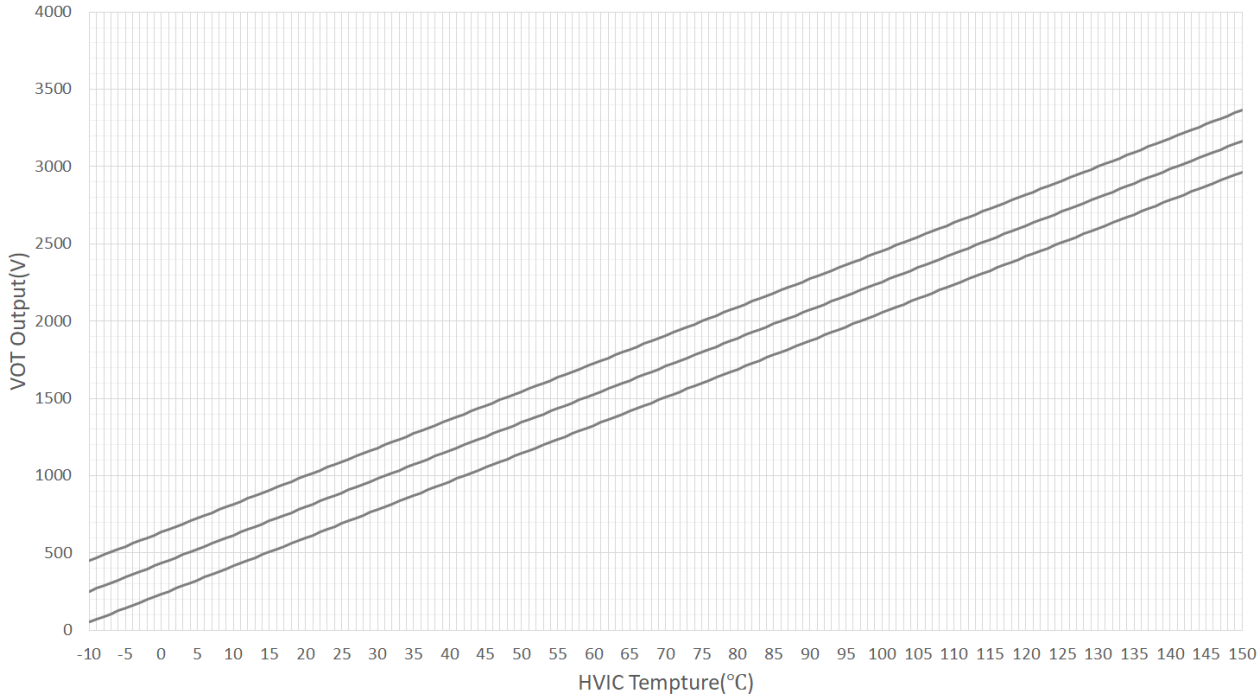


Figure 2: VTS output voltage curve
NOTE:V_{VTS}(mV)=18.2xT_{HVIC}+435±250

Application Guide

Bootstrap Diode Part

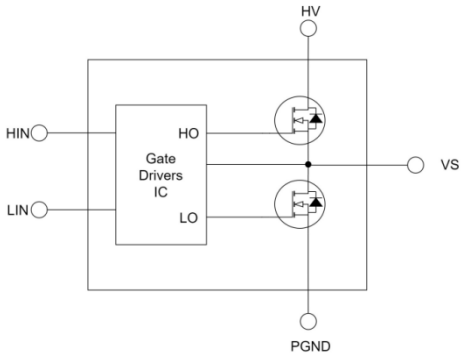

HIN	LIN	HO	LO	Note
1	0	1	0	High Side MOS open,Low Side MOS close
0	1	0	1	High Side MOS close,Low Side MOS open
0	0	0	0	High Side MOS close,Low Side MOS close
1	1	0	0	High Side MOS close,Low Side MOS close

Timing diagram of protection function

[Under-Voltage Protection] Low-side

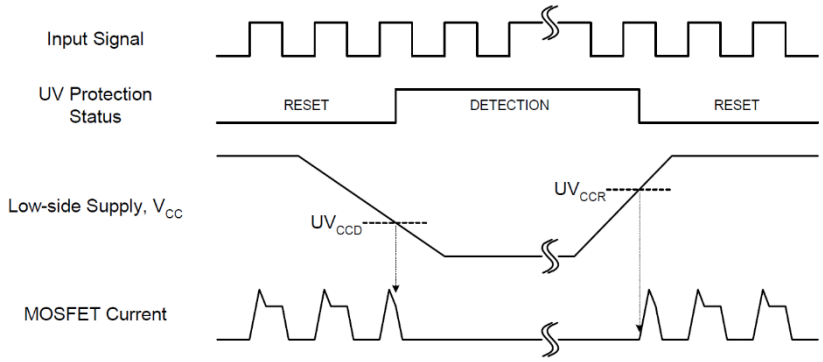


Figure 3: Timing diagram of under-voltage protection (Low-side)

[Under-Voltage Protection] High-side

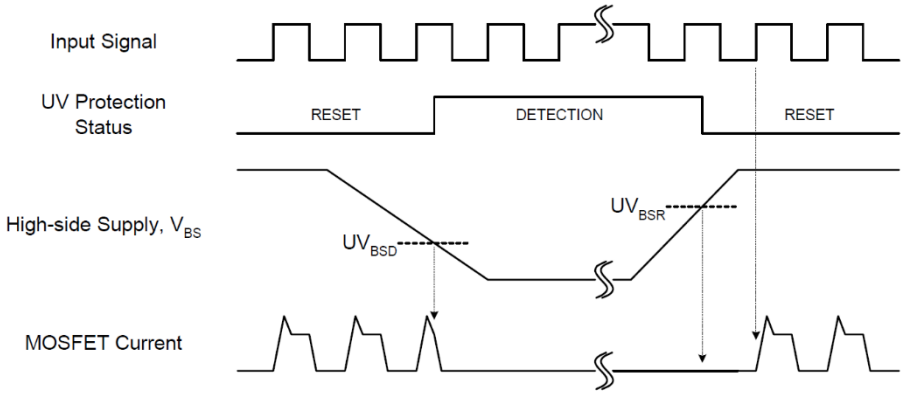


Figure 4: Timing diagram of under-voltage protection (High-side)

Example of Application Circuit

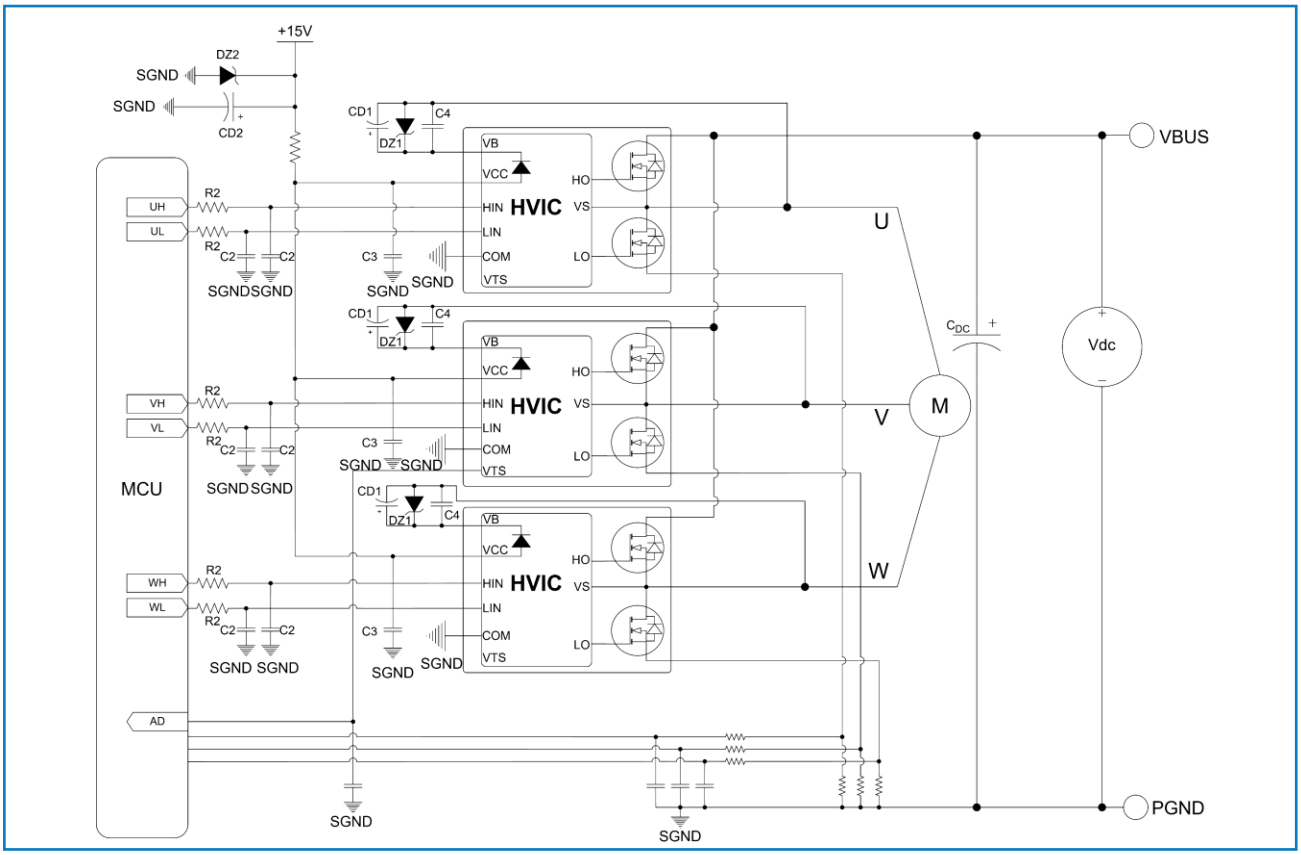


Figure 5: Application Circuit

Notes：

1、To avoid input signal oscillation, the wiring of each input should be as short as possible, and the use of RC filters (R2, C2) on each input signal is recommended. The filters should be with a time constant of about 100 ns and placed as close as possible to the IPM input pins.

2、The use of a bypass capacitor CD2 (aluminum or tantalum) can reduce the transient circuit demand on the power supply. The recommended value of CD2 is range of 10uf or more. Also, to reduce any high-frequency switching noise distributed on the power lines, a decoupling capacitor C3 (100 to 220nF, with low ESR and low ESL) should be placed as close as possible to the VCC pin and in parallel with the bypass capacitor.

3、The decoupling capacitor C4 (from 100 to 220nF, ceramic with low ESR and low ESL), in parallel with each CD1, filters high-frequency disturbance. The recommended value of CD1 is between 2.2uF and 47uF. CD1 and C4 should be placed as close as possible to the SW and BST pins. Bootstrap negative electrodes should be connected to SW terminals directly and separated from the main output wires.

4、To avoid overvoltage on the VCC pin, a Zener diode (DZ2) can be used. Similarly, on the BST pin, a Zener diode (DZ1) can be placed in parallel with each CD1.


5、Low-inductance shunt resistors Rcs to be used for phase leg current sensing.

6、In order to avoid malfunctions, the wiring on vs pins, the shunt resistor and PGND should be as short as possible.

7、The connection of SGND to PGND on one point only (close to the shunt resistor terminal) can reduce the impact of power ground fluctuation.

Package Outlines

UNIT:mm

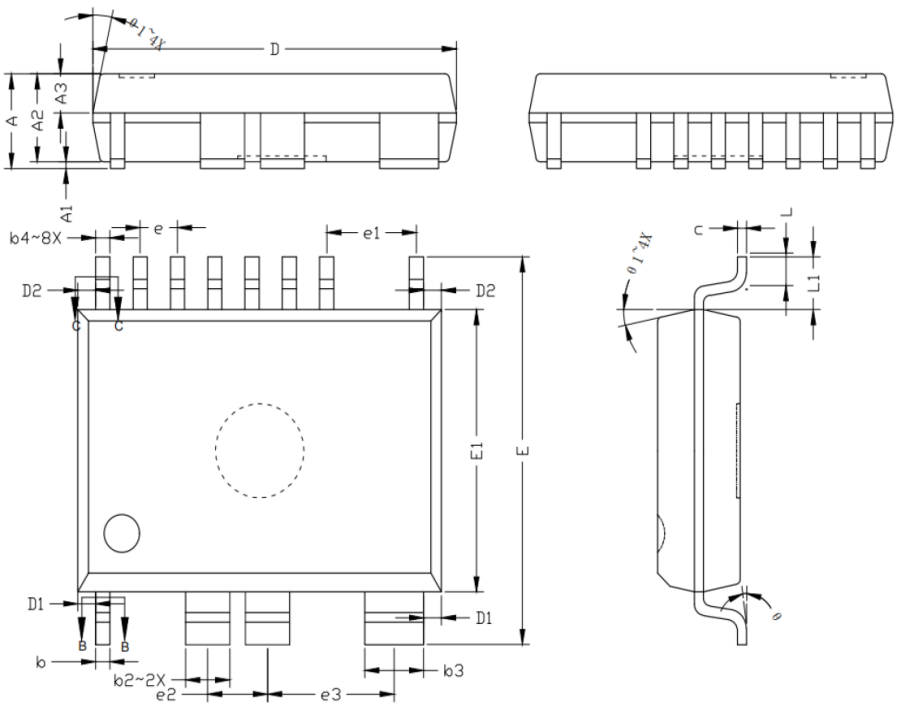

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	--	--	2.615
A1	0.125	--	0.225
A2	2.29	2.34	2.39
A3	0.993	1.043	1.093
b	0.37	--	0.47
b1	0.36	0.40	0.46
b2	--	--	1.25
b3	--	--	1.67
b4	0.35	--	0.45
b5	0.34	0.38	0.44
c	0.25	--	0.29
c1	0.24	0.25	0.26
D	10.20	10.30	10.40
D1	0.502(BSC)		
D2	0.515(BSC)		
E	10.106	10.306	10.506
E1	7.40	7.50	7.60
e	1.058(BSC)		
e1	2.54(BSC)		
e2	1.69(BSC)		
e3	3.60(BSC)		
L	0.75	--	0.97
L1	1.403(REF)		
θ	0°	~	8°
θ1	6°	~	15°

Contact Information

No.1001, Shiwan(7) Road, Pudong District, Shanghai, P.R.China.201207
Tel: 86-21-50310888 Fax: 86-21-50757680 Email: market@way-on.com
WAYON website: http://www.way-on.com
For additional information, please contact your local Sales Representative.
WAYON® is registered trademark of Wayon Corporation.

Product Specification Statement

1.The product specification aims to provide users with a reference regarding various product parameters, performance, and usage. It presents certain aspects of the product's performance in graphical form and is intended solely for users to select product and make product comparisons, enabling users to better understand and evaluate the characteristics and advantages of the product. It does not constitute any commitment, warranty, or guarantee.

2.The product parameters described in the product specification are numerical values, characteristics, and functions obtained through actual testing or theoretical calculations of the product in an independent or ideal state. Due to the complexity of product applications and variations in test conditions and equipment, there may be slight fluctuations in parameter test values. WAYON shall not guarantee that the actual performance of the product when installed in the customer's system or equipment will be entirely consistent with the product specification, especially concerning dynamic parameters. It is recommended that users consult with professionals for product selection and system design. Users should also thoroughly validate and assess whether the actual parameters and performance when installed in their respective systems or equipment meet their requirements or expectations. Additionally, users should exercise caution in verifying product compatibility issues, and WAYON assumes no responsibility for the application of the product.

3.WAYON strives to provide accurate and up-to-date information to the best of our ability. However, due to technical, human, or other reasons, WAYON cannot guarantee that the information provided in the product specification is entirely accurate and error-free. WAYON shall not be held responsible for any losses or damages resulting from the use or reliance on any information in these product specifications. WAYON reserves the right to revise or update the product specification and the products at any time without prior notice, and the user's continued use of the product specification is considered an acceptance of these revisions and updates. Prior to purchasing and using the product, users should verify the above information with WAYON to ensure that the product specification is the most current, effective, and complete. If users are particularly concerned about product parameters, please consult WAYON in detail or request relevant product test reports. Any data not explicitly mentioned in the product specification shall be subject to separate agreement.

4.Users are advised to pay attention to the parameter limit values specified in the product specification and maintain a certain margin in design or application to ensure that the product does not exceed the parameter limit values defined in the product specification. This precaution should be taken to avoid exceeding one or more of the limit values, which may result in permanent irreversible damage to the product, ultimately affecting the quality and reliability of the system or equipment.

5.The design of the product is intended to meet civilian needs and is not guaranteed for use in harsh environments or precision equipment. It is not recommended for use in systems or equipment such as medical devices, aircraft, nuclear power, and similar systems, where failures in these systems or equipment could reasonably be expected to result in personal injury. WAYON shall assume no responsibility for any consequences resulting from such usage.

6.Users should also comply with relevant laws, regulations, policies, and standards when using the product specification. Users are responsible for the risks and liabilities arising from the use of the product specification and must ensure that it is not used for illegal purposes. Additionally, users should respect the intellectual property rights related to the product specification and refrain from infringing upon any third-party legal rights. WAYON shall assume no responsibility for any disputes or controversies arising from the above-mentioned issues in any form.