
BAV3004D5

High-speed switching diode

Features

- Fast Switching Devices
- SOD523 Thin SMD Package
- RoHS Compliant / Green EMC
- Matte Tin (Sn) Lead finish
- Cathode Band / Device marking
- Moisture Level Sensitivity

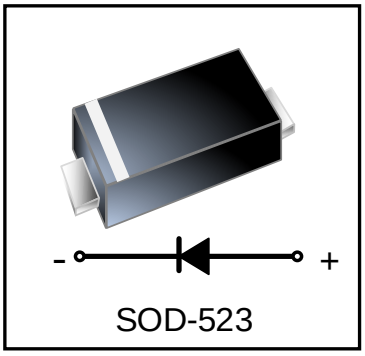

SOD-523

Applications

- Surface Mount Package Ideally Suited for Automatic Insertion
- For General Purpose Switching Applications
- High Conductance

Absolute Maximum Rating (T_a=25°C unless otherwise noted)


Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	350	V
Forward Current	I_F	225	mA
Non-repetitive Peak Forward Surge Current@t=8.3ms	I_{FSM}	2.0	A
Power Dissipation	P_D	200	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	625	℃/W
Junction Temperature	T_J	150	℃
Storage Temperature	T_{STG}	-55 to +150	℃


Electrical Characteristics (T_{amb}=25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	I_F = 20mA	-	-	0.87	V
		I_F = 100mA	-	-	1.00	
		I_F = 200mA	-	-	1.25	
Reverse Current	I_R	V_R = 240V(T_a=25°C)	-	-	0.1	μA
		V_R = 240V(T_a=150°C)	-	-	100	μA
Diode Capacitance	C_D	V_R =0V,f=1MHz	-	-	5.0	pF
Reverse Recovery Time	t_{rr}	I_F=I_R=30mA,I_{rr}=0.1I_R, R_L=100Ω	-	-	50	ns

Outline Drawing – SOD-523

PACKAGE OUTLINE

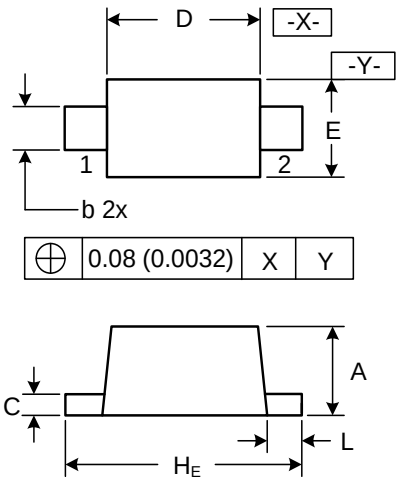




SOD-523

DIMENSIONS

SYMBOL	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.50	0.70	0.020	0.028
b	0.25	0.35	0.010	0.014
C	0.07	0.20	0.0028	0.0079
D	1.10	1.30	0.043	0.051
E	0.70	0.90	0.028	0.035
H_E	1.50	1.70	0.059	0.067
L	0.15	0.25	0.006	0.010



DIMENSIONS: MILLIMETERS

Notes

1. Controlling Dimensions in Millimeters.
2. Dimensions are exclusive of mold flash and metal burrs.

Marking Codes

Part Number	BAV3004D5
Marking Code	**4P**

Package Information

Qty：5k/Reel

CONTACT INFORMATION

No.1001, Shiwan (7) Road, Pudong District, Shanghai, P.R.China.201207
Tel: 86-21-68969993 Fax: 86-21-50757680 Email: market@way-on.com
WAYON website: **http://www.way-on.com**
For additional information, please contact your local Sales Representative.

WAYON ® is registered trademark of Wayon Corporation.

Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.