
WSR4530CT

SCHOTTKY BARRIER RECTIFIER

Features

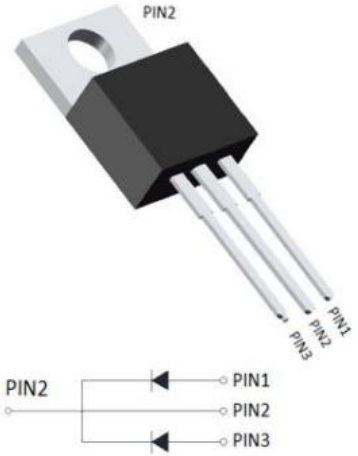

- 30A Schottky barrier diode
- Schottky barrier rectifier
- Excellent high temperature stability
- Low forward voltage
- High forward surge capability
- High current capability
- Extremely low thermal resistance

Mechanical Data

- Case: TO-220 molded plastic package
- Polarity: As marked

Absolute Maximum Ratings（Ta=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	WSR4530CT	UNIT
Repetitive Peak Reverse Voltage	V_{RRM}	45	V
Average Rectified Output Current @60Hz -sine wave, R- load, Ta=25℃	I_O	15(per leg)	A
		30(total device)	
Forward Surge Current (Non-repetitive) @ 60Hz Half-sine wave,1 cycle, Ta=25℃	I_{FSM}	200	A
Storage Temperature	T_{stg}	-55 ~+150	℃
Junction Temperature	T_j	-55 ~+150	℃

Electronics characteristics（Ta=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	TEST CONDITIONS	WSR4530CT		UNIT
			Typ	Max	
Maximum instantaneous forward voltage drop per diode	V_F	I_F=15.0A(per leg)	0.65	0.7	V
Leakage Current	I_R	$V_R=V_{RRM}$, Tj=25℃	/	0.1	mA
		$V_R=V_{RRM}$, Tj=125℃	5	/	

Thermal Characteristics (Ta=25℃ Unless otherwise specified)

PARAMETER		SYMBOL	WSR4530CT	UNIT
Thermal Resistance	Between Junction to Case	$R_{\theta J-C}$	2.0	℃/W

Typical characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

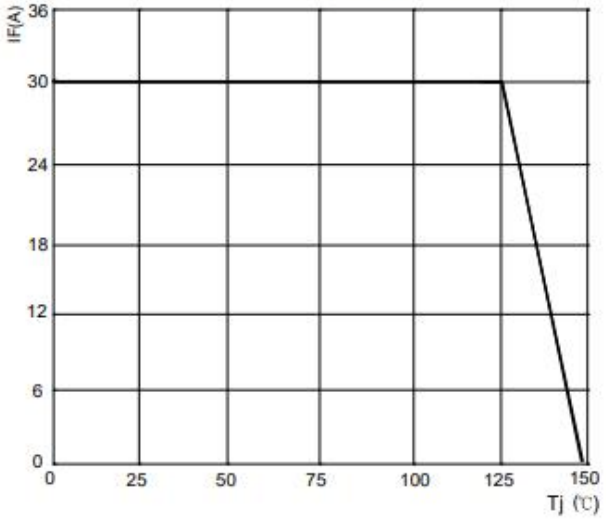


FIG.2: TYPICAL FORWARD CHARACTERISTICS

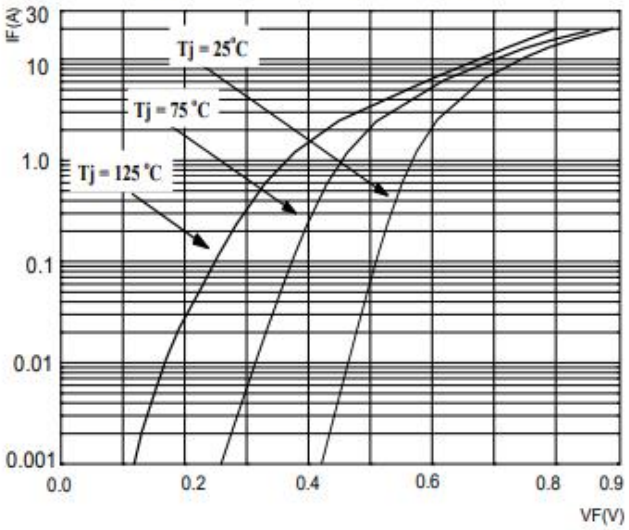


FIG.3: TOTAL CAPACITANCE DERATING CURVE



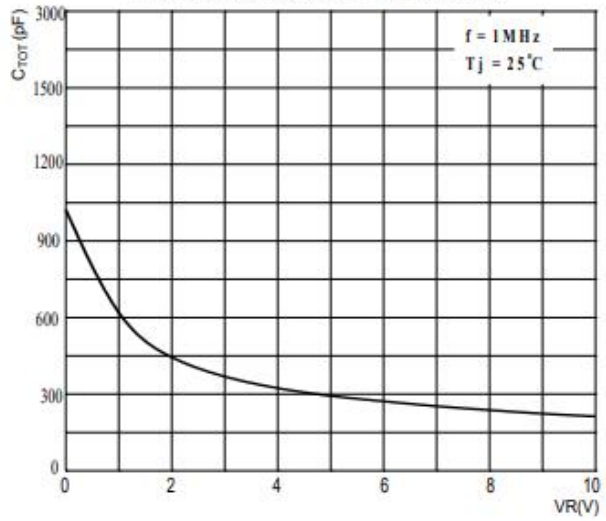


FIG.4: TYPICAL REVERSE CHARACTERISTICS

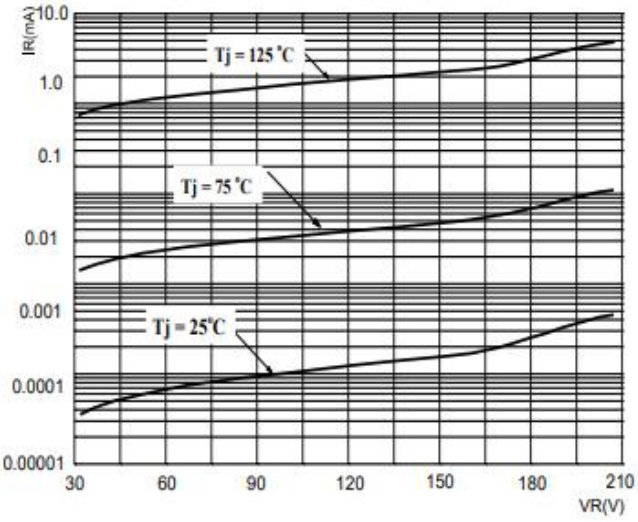

Outline Drawing

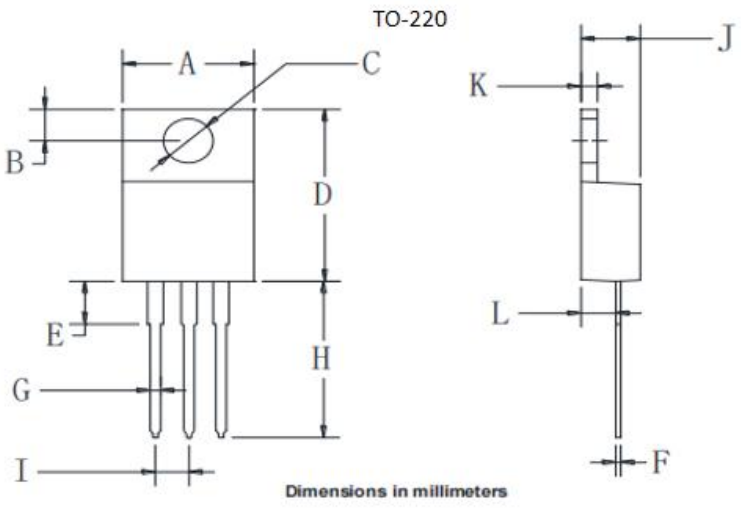

TO-220		
Dim	Min	Max
A	9.5	10.9
B	2.22	3.27
C	3.34	4.31
D	14.5	16.1
E	-	4.46
F	0.28	0.64
G	0.68	0.94
H	12.75	14.62
I	2.01	3.07
J	4.01	5.1
K	1.14	1.4
L	2.14	3.19

Marking Code

Part Number	WSR4530CT
Marking Code	MBR3045CT

Package Information

Quantity per tube: 50pcs

Contact Information

No.1001, Shiwan(7) Road, Pudong District, Shanghai, P.R.China.201207
Tel: 021-68969993 Fax: 86-21-50757680 Email: market@way-on.com
WAYON website: **http://www.way-on.com**
For additional information, please contact your local Sales Representative.

WAYON® is registered trademarks of Wayon Corporation.

Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.