
WSR6010D

Schottky Barrier Diode

Features

- Low Forward Voltage Schottky Rectifier
- RoHS Compliant / Green EMC
- Matte Tin (Sn) Lead FInish
- Cathode Band / Device Marking

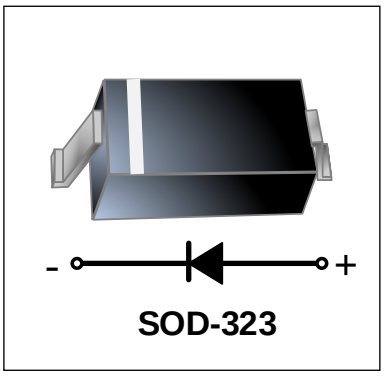

SOD-323

Applications

- Fast Switching RF and Digital Applications
- Switch Mode Power Supply
- Inverse Polarity Protection
- Low Power Consumption Applications
- Middle Current Rectification

Absolute Maximum Rating

Parameter	Symbol	Value	Unit
Non- Repetitive Peak Reverse Voltage	V_{RM}	60	V
Repetitive Peak Reverse Voltage	V_{RRM}	60	V
RMS Reverse Voltage	$V_{R(RMS)}$	42	V
Average Rectified Output Current	I_O	1	A
Non- Repetitive Peak Forward Surge Current @t=8.3ms	I_{FSM}	10	A
Power Dissipation	P_D	200	mW
Junction Temperature	T_J	125	°C
Storage Temperature	T_{STG}	-55 to +125	°C


Electrical Characteristics (Tamb=25°C unless otherwise noted)


Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	V_{BR}	I_R =100μA	60	-	-	V
Reverse Voltage Leakage Current	I_R	V_R = 60V	-	-	100	μA
Forward Voltage	V_F	I_F = 1A	-	-	0.70	V
Capacitance	C_T	V_R=4V,f=1MHz	-	110	-	pF

©2019 WAYON Corporation

Outline Drawing – SOD-323

PACKAGE OUTLINE

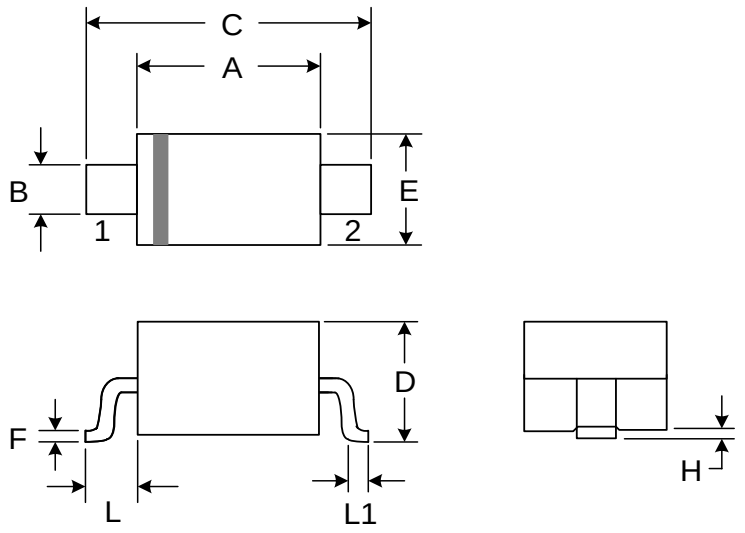




SOD-323

DIMENSIONS

SYMBOL	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	1.60	1.80	0.063	0.071
B	0.25	0.35	0.010	0.014
C	2.50	2.70	0.098	0.106
D	0.80	1.00	0.000	0.039
E	1.20	1.40	0.047	0.055
F	0.08	0.15	0.003	0.006
L	0.475 REF		0.019REF	
L1	0.25	0.40	0.010	0.016
H	0.00	0.10	0.000	0.004

MOUNTING PAD

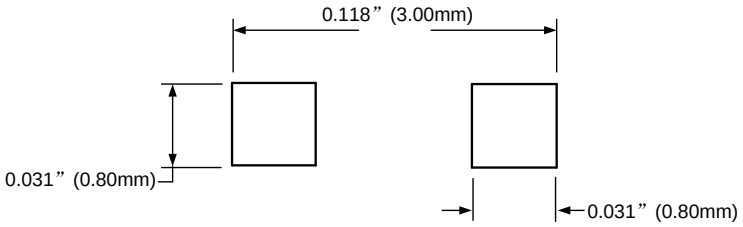

Notes

1. Controlling Dimensions in Millimeters.
2. Dimensions are exclusive of mold flash and metal burrs.

Marking Codes

Part Number	WSR6010D
Marking Code	SM

Package Information

Qty：3k/Reel

CONTACT INFORMATION

No.1001, Shiwan (7) Road, Pudong District, Shanghai, P.R.China.201207
Tel: 86-21-68969993 Fax: 86-21-50757680 Email: market@way-on.com
WAYON website: **http://www.way-on.com**
For additional information, please contact your local Sales Representative.

WAYON ® is registered trademark of Wayon Corporation.

Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.