
WT772Y

PNP Transistor

Features

- Complementary to WT882Y
- Medium Power Switching or Amplification Applications




SOT-89


Mechanical Characteristics

- SOT-89 Package
- Marking : Making Code
- RoHS Compliant & HF
- Device meets MSL3 requirement

Schematic & PIN Configuration

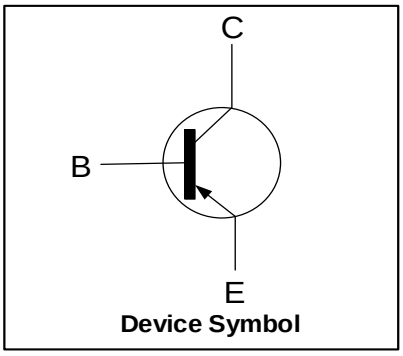

Device Symbol

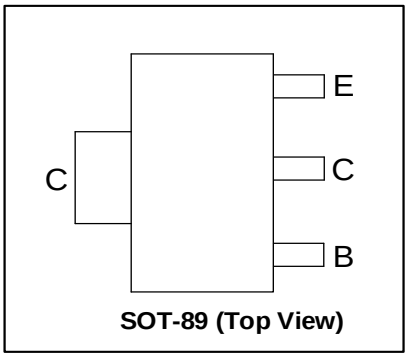

SOT-89 (Top View)

Absolute Maximum Rating (T_{amb}=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	-40	V
Collector Emitter Voltage	V_{CEO}	-30	V
Emitter Base Voltage	V_{EBO}	-6	V
Collector Current	I_C	-3	A
Collector Power Dissipation	P_C	500	mW
Junction Temperature Range	T_j	-55 ~ 150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	250	°C/W

©2024 WAYON Corporation

Electrical Characteristics (T_{amb}=25°C unless otherwise noted)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	I_C = -100μA, I_E = 0	-40	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C = -10mA, I_B = 0	-30	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	I_E = -100μA, I_C = 0	-6	-	-	V
Collector Cut-off Current	I_{CBO}	V_{CB} = -40V, I_E = 0	-	-	-1	μA
Collector Cut-off Current	I_{CEO}	V_{CE} = -30V, I_B = 0	-	-	-10	μA
Emitter Cut-off Current	I_{EBO}	V_{EB} = -6V, I_C = 0	-	-	-1	μA
DC Current Gain	$h_{FE(1)}$	V_{CE} = -2V, I_C = -100mA	32	-	-	
	$h_{FE(2)}$	V_{CE} = -2V, I_C = -1A	160	-	320	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C = -2A, I_B = -0.2A	-	-	-0.45	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	I_C = -2A, I_B = -0.2A	-	-	-1.50	V
Transition Frequency	f_T	V_{CE}= -5V,I_C= -0.1A,f=10MHz	50	-	-	MHz

Typical Characteristics

Figure 1.Static Characteristics

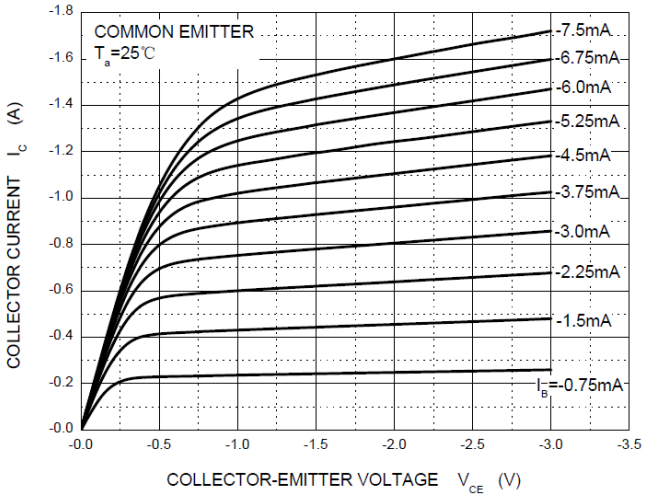


Figure 2. h_{FE} vs. I_C

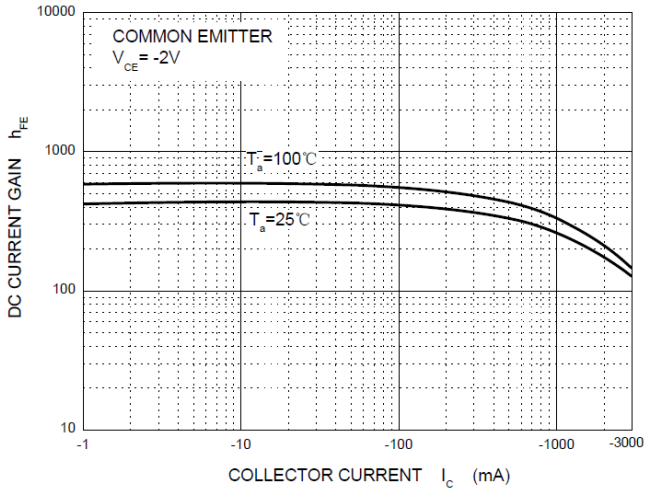


Figure 3. $V_{CE(sat)}$ vs. I_C

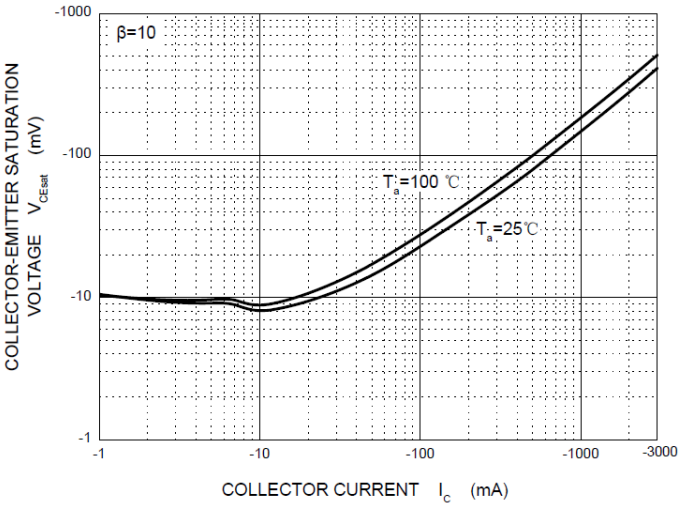


Figure 4. $V_{BE(sat)}$ vs. I_C

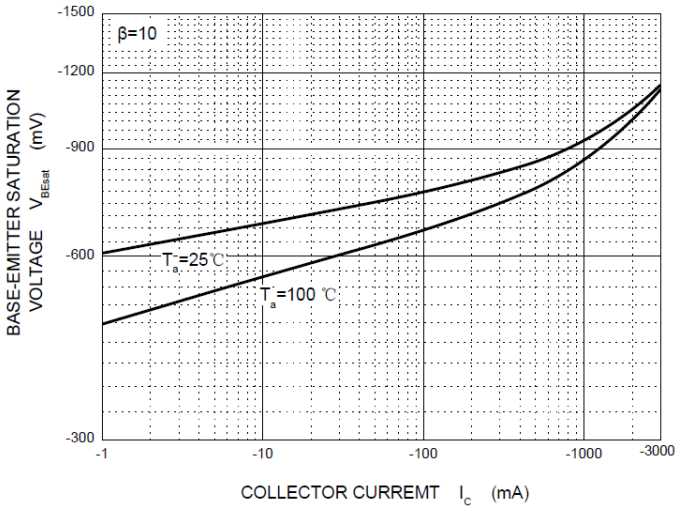


Figure 5. I_C vs. V_{BE}

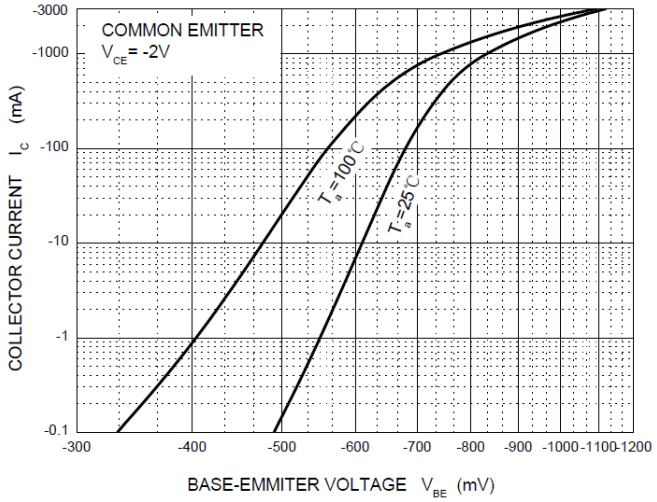


Figure 6. f_T vs. I_C



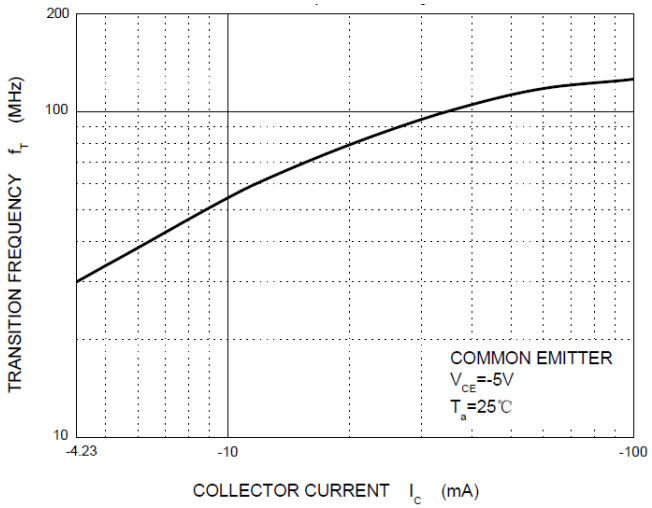



Figure 7. P_C vs. T_a

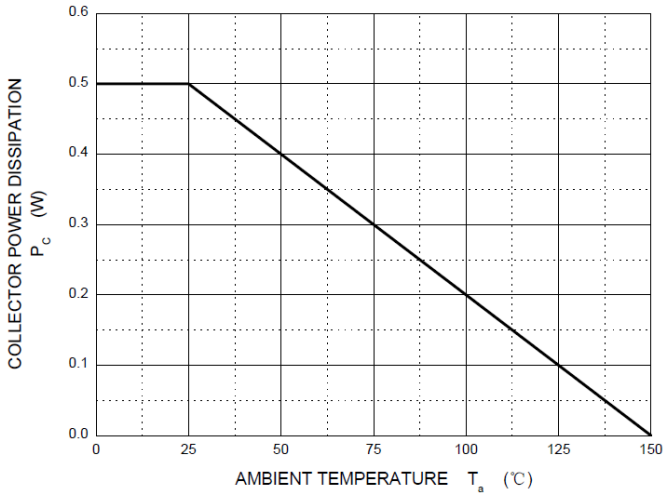

Outline Drawing – SOT-89

PACKAGE OUTLINE

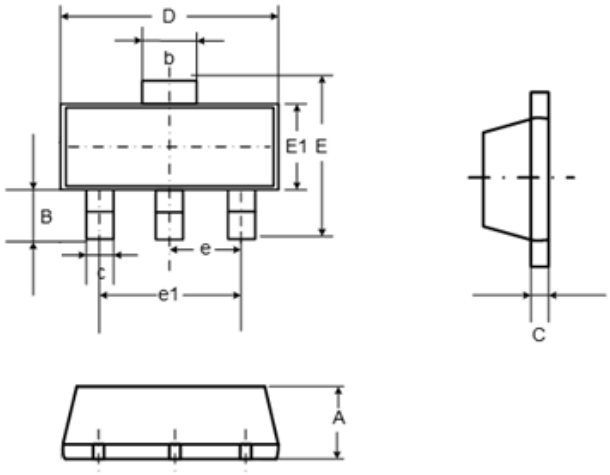




SOT-89-3L

SYMBOL	MILIMETER	
	MIN	MAX
A	1.40	1.60
B	0.85	1.20
b	1.50	1.80
C	0.35	0.44
c	0.32	0.52
E	3.94	4.30
E1	2.30	2.60
D	4.40	4.60
e	1.45	1.55
e1	3.00REF	

Marking Codes

Part Number	WT772Y
Marking Code	

Package Information

Qty：1k/Reel

CONTACT INFORMATION

No.1001, Shiwan (7) Road, Pudong District, Shanghai, P.R.China.201207
Tel: 86-21-68969993 Fax: 86-21-50757680 Email: market@way-on.com
WAYON website: **http://www.way-on.com**
For additional information, please contact your local Sales Representative.

WAYON ® is registered trademark of WAYON Corporation.

Product Specification Statement

1. The product specification aims to provide users with a reference regarding various product parameters, performance, and usage. It presents certain aspects of the product's performance in graphical form and is intended solely for users to select product and make product comparisons, enabling users to better understand and evaluate the characteristics and advantages of the product. It does not constitute any commitment, warranty, or guarantee.

2. The product parameters described in the product specification are numerical values, characteristics, and functions obtained through actual testing or theoretical calculations of the product in an independent or ideal state. Due to the complexity of product applications and variations in test conditions and equipment, there may be slight fluctuations in parameter test values. WAYON shall not guarantee that the actual performance of the product when installed in the customer's system or equipment will be entirely consistent with the product specification, especially concerning dynamic parameters. It is recommended that users consult with professionals for product selection and system design. Users should also thoroughly validate and assess whether the actual parameters and performance when installed in their respective systems or equipment meet their requirements or expectations. Additionally, users should exercise caution in verifying product compatibility issues, and WAYON assumes no responsibility for the application of the product.

3. WAYON strives to provide accurate and up-to-date information to the best of our ability. However, due to technical, human, or other reasons, WAYON cannot guarantee that the information provided in the product specification is entirely accurate and error-free. WAYON shall not be held responsible for any losses or damages resulting from the use or reliance on any information in these product specifications. WAYON reserves the right to revise or update the product specification and the products at any time without prior notice, and the user's continued use of the product specification is considered an acceptance of these revisions and updates. Prior to purchasing and using the product, users should verify the above information with WAYON to ensure that the product specification is the most current, effective, and complete. If users are particularly concerned about product parameters, please consult WAYON in detail or request relevant product test reports. Any data not explicitly mentioned in the product specification shall be subject to separate agreement.

4. Users are advised to pay attention to the parameter limit values specified in the product specification and maintain a certain margin in design or application to ensure that the product does not exceed the parameter limit values defined in the product specification. This precaution should be taken to avoid exceeding one or more of the limit values, which may result in permanent irreversible damage to the product, ultimately affecting the quality and reliability of the system or equipment.

5. The design of the product is intended to meet civilian needs and is not guaranteed for use in harsh environments or precision equipment. It is not recommended for use in systems or equipment such as medical devices, aircraft, nuclear power, and similar systems, where failures in these systems or equipment could reasonably be expected to result in personal injury. WAYON shall assume no responsibility for any consequences resulting from such usage.

6. Users should also comply with relevant laws, regulations, policies, and standards when using the product specification. Users are responsible for the risks and liabilities arising from the use of the product specification and must ensure that it is not used for illegal purposes. Additionally, users should respect the intellectual property rights related to the product specification and refrain from infringing upon any third-party legal rights. WAYON shall assume no responsibility for any disputes or controversies arising from the above-mentioned issues in any form.